



THE DATASHEET OF SRAH-03L1A0R

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output

bel
POWER PRODUCTS

xRAH-03L1A0

RoHS Compliant

Rev.A

- Non-Isolated
- High Efficiency
- High Power Density
- Low Cost
- Remote On/Off
- Fixed Frequency
- OCP/SCP
- UL60950-1 Recognized (UL/cUL)



Description

The Bel xRAH-03L1A0 modules are a series of non-isolated, step down dc/dc converters that operate from a nominal 12 Vdc source. These converters are available in an output voltage range from 0.9 Vdc to 3.3 Vdc. It is packaged in a compact, overmolded package rated at 3 A. Optional lead forming provides a vertical mount product for minimal footprint or a surface mount option for a very low profile. The output is closely regulated and the efficiency for 3.3 Vdc output is typically 88% at full load. Typical features include remote on/off, over current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
0.9 V - 3.3 V	5.0 V - 24 V	3 A	10 W	88%	SRAH-03L1A0	VRAH-03L1A0

- Notes:** 1. Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	25 V	
Output Enable Terminal Voltage	-0.3 V	-	24 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
Vo=3.3 V	5 V	-	24 V	
Vo=2.5 V	5 V	-	24 V	
Vo=1.8 V	5 V	-	18 V	
Vo=1.5 V	5 V	-	15 V	
Vo=1.2 V	5 V	-	12 V	
Vo=0.9 V	5 V	-	9 V	
Input Current (no load)	-	-	100 mA	
Input Current (full load)	-	-	3 A	
Remote Off Input Current	-	3 mA	10 mA	
Input Reflected Ripple Current (pk-pk)	-	200 mA	-	With simulated source impedance of 500 nH, 5 Hz to 20 MHz. Use one 100 uF/ 35 V Tantalum capacitor and one 3.3 uF/ 50 V ceramic capacitor at the input
Input Reflected Ripple Current (rms)	-	50 mA	-	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn on Voltage Threshold	-	4.0 V	-	
Turn off Voltage Threshold	3.5 V	-	4.9 V	

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output



Output Specifications

Parameter		Min	Typ	Max	Notes	
Output Voltage Set Point		Vo=3.3 V	3.200 V	3.3 V	3.400 V	Test conditions: Io=50% full load.
		Vo=2.5 V	2.425 V	2.5 V	2.575 V	
		Vo=1.8 V	1.746 V	1.8 V	1.854 V	
		Vo=1.5 V	1.470 V	1.5V	1.530 V	
		Vo=1.2 V	1.176 V	1.2 V	1.224 V	
		Vo=0.9 V	0.882 V	0.9 V	0.918 V	
Line Regulation		Vo=3.3 V	-	±10 mV	±20 mV	
		Vo=2.5 V	-	±10 mV	±15 mV	
		Vo=1.8 V	-	±5 mV	±10 mV	
		Vo=1.5 V	-	±5 mV	±10 mV	
		Vo=1.2 V	-	±5 mV	±10 mV	
		Vo=0.9 V	-	±3 mV	±7.5 mV	
Load Regulation		Vo=3.3 V	-	±25 mV	±45 mV	
		Vo=2.5 V	-	±15 mV	±35 mV	
		Vo=1.8 V	-	±10 mV	±25 mV	
		Vo=1.5 V	-	±10 mV	±20 mV	
		Vo=1.2 V	-	±8 mV	±15 mV	
		Vo=0.9 V	-	±5 mV	±13 mV	
Regulation Over Temperature (-40 °C to +85 °C)		Vo=3.3 V	-	±30 mV	±60 mV	
		Vo=2.5 V	-	±25 mV	±45 mV	
		Vo=1.8 V	-	±20 mV	±33 mV	
		Vo=1.5 V	-	±15 mV	±27 mV	
		Vo=1.2 V	-	±10 mV	±22 mV	
		Vo=0.9 V	-	±8 mV	±16 mV	
Output Current Range		0 A	-	3 A		
Output DC Current Limit		4 A	-	8 A		
Short Circuit Surge Transient		-	0.8 A ² s	1.5 A ² s		
Ripple and Noise (rms)		-	30 mV	50 mV	Test conditions: 0-20 MHz BW, with 1 uF /16 V ceramic capacitor at the output.	
Ripple and Noise (pk-pk)		Vo=3.3 V	-	70 mV		130 mV
		Vo=2.5 V	-	70 mV		100 mV
		Vo=1.8 V	-	60 mV		100 mV
		Vo=1.5 V	-	60 mV		100 mV
		Vo=1.2 V	-	50 mV		100 mV
Vo=0.9 V		-	50 mV	100 mV		
Turn on Time		-	7 mS	10 mS		
Overshoot at Turn on		-	0%	3%		
Output Capacitance		0 uF	-	1200 uF		
Transient Response						
50% ~ 100% Max Load	Overshoot	3.3 V	-	150 mV	200 mV	Test conditions: di/dt = 0.5 A/us, with 220 uF external capacitor at the output.
	Settling Time		-	50 uS	100 uS	
100% ~ 50% Max Load	Overshoot		-	150 mV	200 mV	
	Settling Time		-	50 uS	100 uS	
50% ~ 100% Max Load	Overshoot	0.9 V-2.5 V	-	100 mV	150 mV	
	Settling Time		-	50 uS	100 uS	
100% ~ 50% Max Load	Overshoot		-	100 mV	150 mV	
	Settling Time		-	50 uS	100 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Vin=12.0V; Io=Io, max
Vo=3.3 V	85%	88%	-	
Vo=2.5 V	82%	85%	-	
Vo=1.8 V	79%	82%	-	
Vo=1.5 V	77%	80%	-	
Vo=1.2 V	74%	77%	-	
Vo=0.9 V	72%	75%	-	
Switching Frequency	250 kHz	300 kHz	360 kHz	
MTBF	9,900,543 hours			Calculated Per Bell Core SR-332 (Vin=12 V; Vo=3.3 V; Io =2.4 A; Ta = 25 °C)
Dimensions (surface mount)				
Inches (L × W × H)	0.78 x 0.7 x 0.32			
Millimeters (L × W × H)	19.81 x 17.78 x 8.13			
Dimensions (vertical)				
Inches (L × W × H)	0.7 x 0.308 x 0.65			
Millimeters (L × W × H)	17.78 x 7.82 x 16.51			
Weight	-	4.9 g	-	


Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	1 V	Remote on/off pin open, Unit On
Signal High (Unit On)	2.8 V	-	24 V	

Output Trim Equations

Equations for calculating the trim resistor given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vo) are shown below. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{trim_up} = \left(\frac{6.928}{V_{adj_up} - V_o} - 1 \right) K\Omega$$

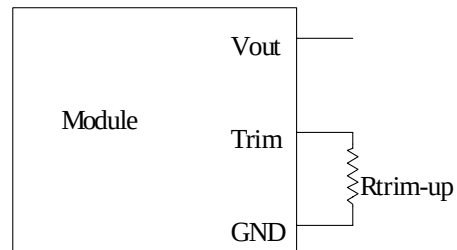

Note: Output voltage Vo=0.902 V when Rtrim_up is not connected.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input


0.9 Vdc - 3.3 Vdc/3 A Output

bel
POWER PRODUCTS


Efficiency Data

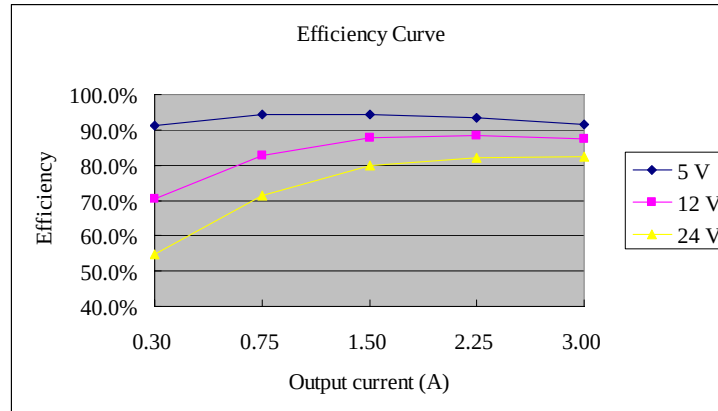

$V_o=3.3\text{ V}$

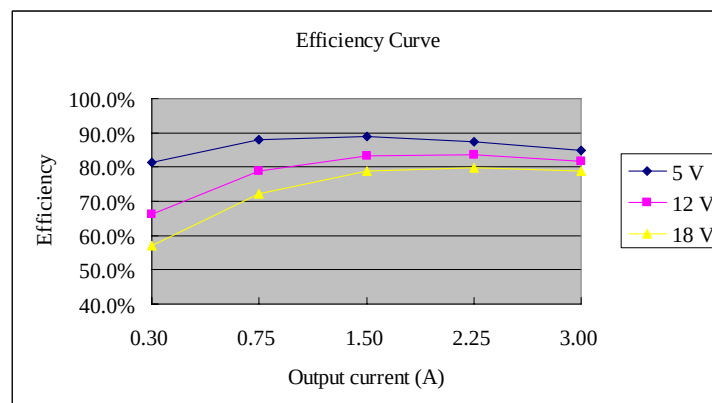

$V_o=1.8\text{ V}$

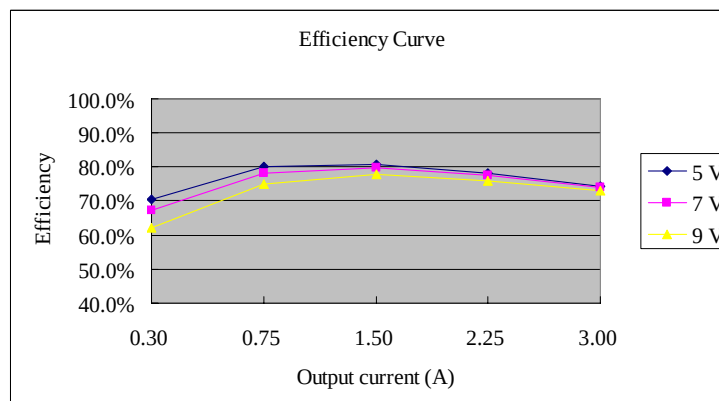


$V_o=0.9\text{ V}$

NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output


bel
POWER PRODUCTS

Thermal Derating Curve

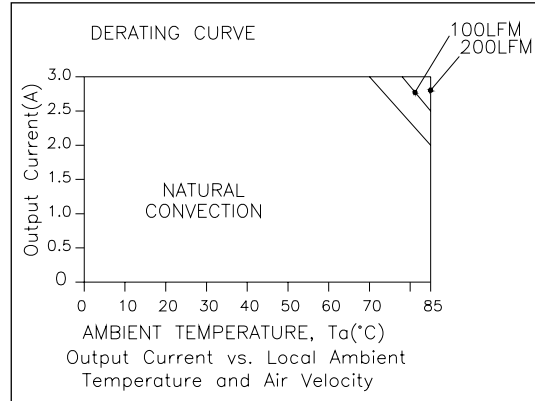


xRAH-03L1A0


Ripple and Noise Waveforms

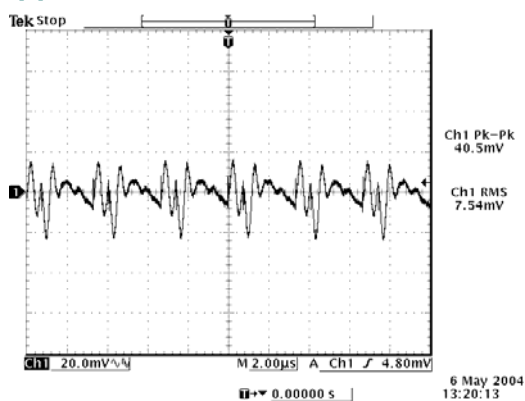

5 Vdc input, 0.9 V output

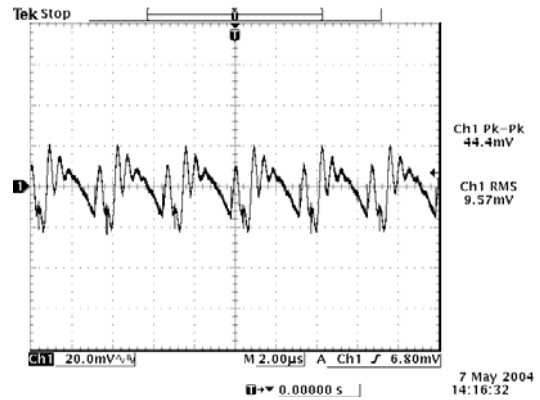

12 Vdc input, 1.8 V output

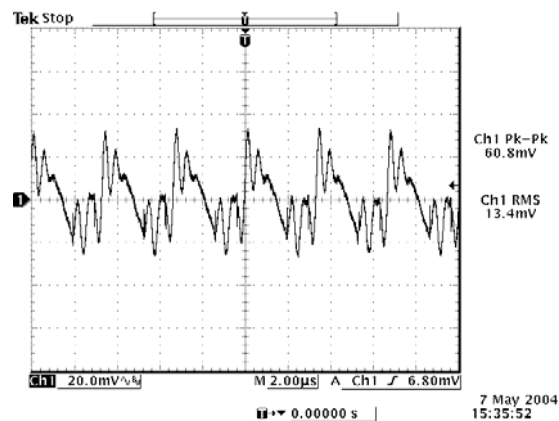

12 Vdc input, 3.3 V output


Note: Ripple and noise at full load, with 1µF/16V ceramic cap at the output, $T_a=25^{\circ}\text{C}$.

NON-ISOLATED DC/DC CONVERTERS


5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output




Transient Response Waveforms

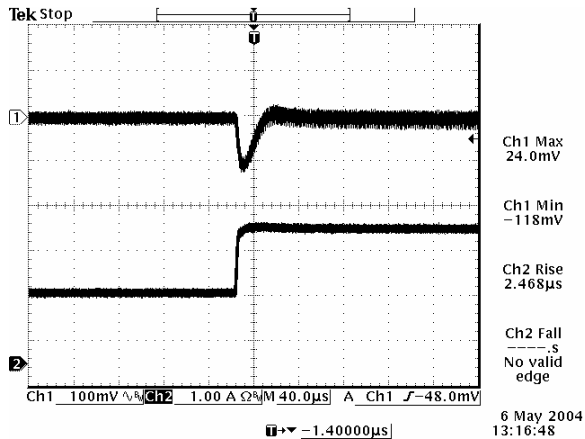


50% to 100% load 5 V input, 0.9 V output

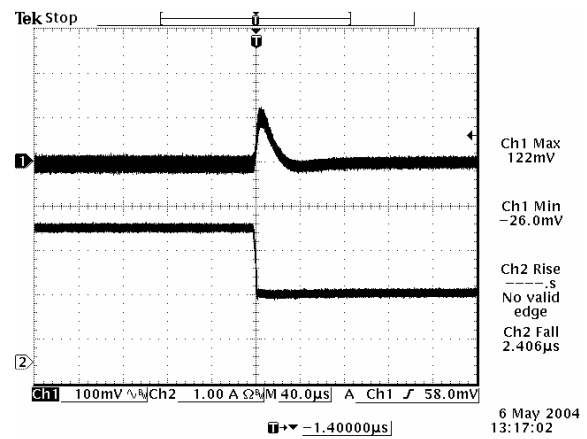


50% to 100% load 5 V input, 0.9 V output

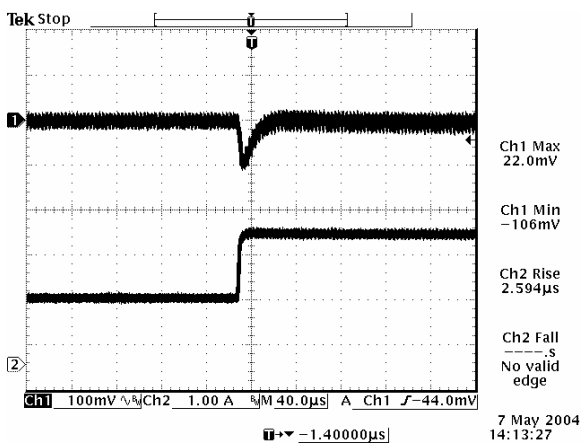


50% to 100% load 12 V input, 1.8 V output

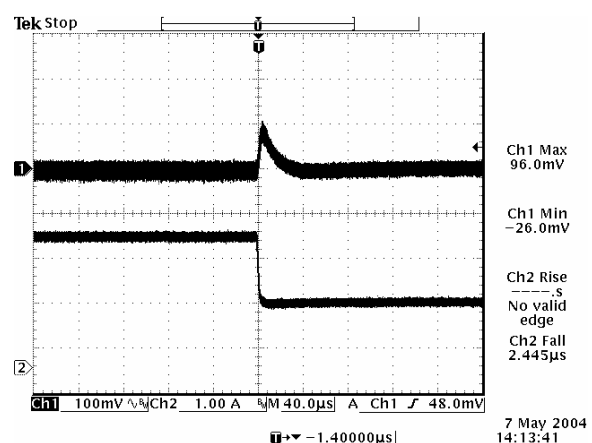

50% to 100% load 12 V input, 1.8 V output

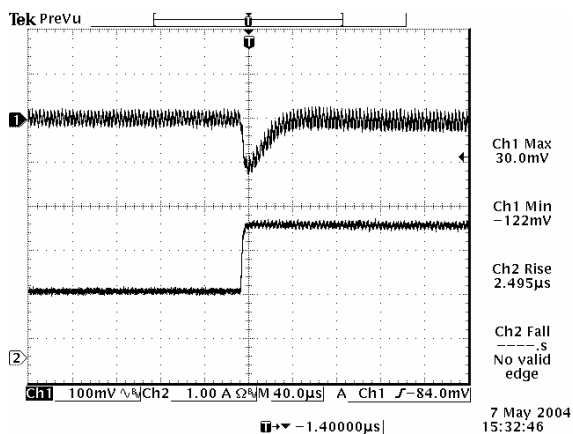

50% to 100% load 12 V input, 3.3 V output

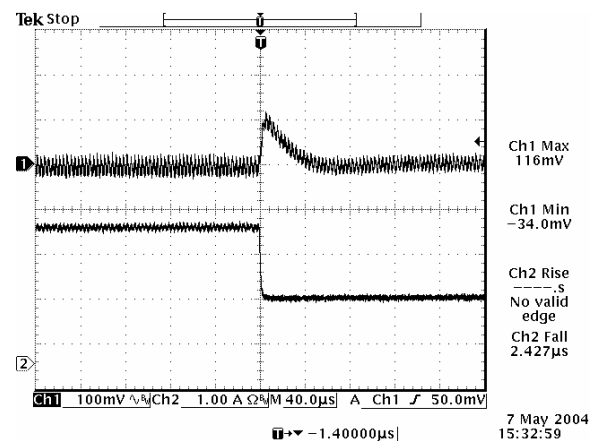

50% to 100% load 12 V input, 3.3 V output

Note: Transient Response at $di/dt=0.5$ A/ μ S, with 220 μ F/10 V external cap, $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

5 Vdc - 24 Vdc Input 0.9 Vdc - 3.3 Vdc/3 A Output



Mechanical Outline



SRAH-03L1A0

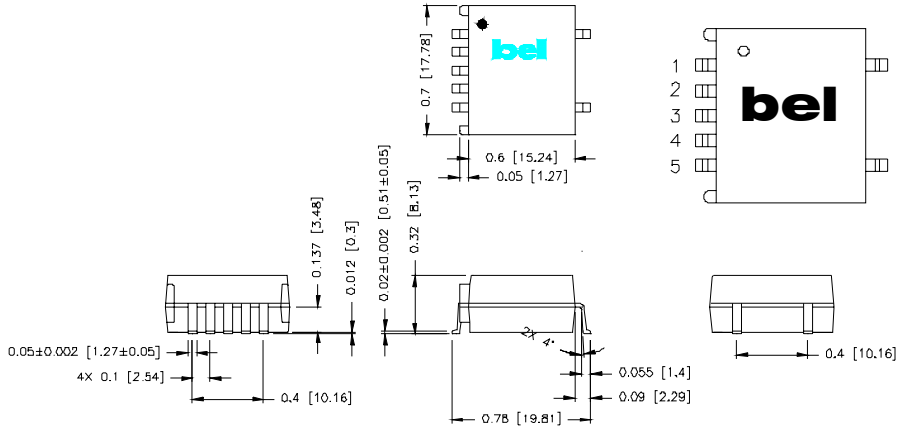

Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A


VRAH-03L1A0

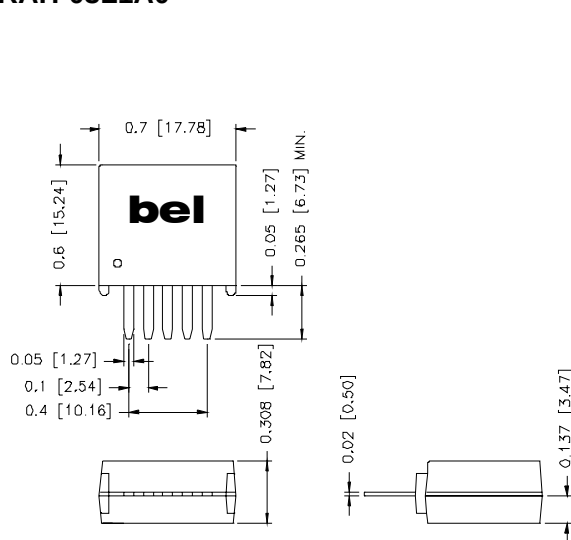


Pin Connections

Pin	Function
1	Remote On/Off (option)
2	Vin
3	Ground
4	Vout
5	Trim (option)

RECOMMENDED PCB PAD LAYOUT



SURFACE MOUNT



THROUGH HOLE

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 010807

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [SRAH-03L1A0R](#) on WIN SOURCE
- ⊖ [Bel Power Solutions](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management