



THE DATASHEET OF ABC40-1012G

ABC40 Series


AC-DC Open Frame Power Supplies

Not For New Design
Please refer to exact equivalent product series
WLT40

The ABC40 Series of open-frame power supplies, with its wide universal 90 – 264 VAC input range and high power density, is available at 40 W of output power and a variety of single and multiple output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for telecom, datacom, industrial equipment and other applications.

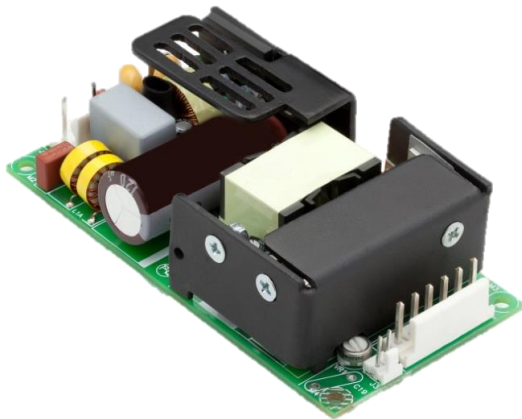

Key Features & Benefits

- 4 x 2 x 1.2 Inch Form Factor
- 40 W convection-cooled rating
- Single to Triple Outputs
- High Efficiency > 85%
- Low conducted and radiated noise
- No Load Power < 0.3 W
- IEC / EN / UL 62368-1 compliant
- IEC Protection Class Options:
 - Class I: Earth pin J4 (no suffix)
 - Class II: No Earth pin (-2 suffix)
- RoHS Compliant
- Cover Kit Accessory Available

Applications

- Lighting
- Industrial Processing
- Applied Computing
- Instrumentation
- Automation Controls
- Robotics
- Wireless Communication
- Test and Measurement

1. MODEL SELECTION

MODEL ¹	VOLTAGE	MAX LOAD ²	MIN LOAD ³	RIPPLE ⁴	POWER
ABC40-1005G	5.1 V	8.0 A	0.0 A	1%	40 W
ABC40-1012G	12 V	3.5 A	0.0 A	1%	40 W
ABC40-1015G	15 V	2.7 A	0.0 A	1%	40 W
ABC40-1024G	24 V	1.7 A	0.0 A	1%	40 W
ABC40-1048G	48 V	0.83 A	0.0 A	1%	40 W
ABC40-3000G	V ₁ = 5.2 V	6.0 A	0.5 A	1.5%	40 W
	V ₂ = 12.5 V	2.0 A	0.1 A	1%	
	V ₃ = -12.8 V	0.5 A	0.0 A	1%	
ABC40-3001G	V ₁ = 5.2 V	6.0 A	0.5 A	1.5%	40 W
	V ₂ = 24 V	1.0 A	0.1 A	1%	
	V ₃ = -12.8 V	0.5 A	0.0 A	1%	
ABC40-3002G	V ₁ = 5.2 V	6.0 A	0.5 A	1.5%	40 W
	V ₂ = 15 V	1.5 A	0.1 A	1%	
	V ₃ = -15 V	0.5 A	0.0 A	1%	
ABC40-3003G	V ₁ = 3.3 V	6.0 A	1.0 A	1.5%	40 W
	V ₂ = 5 V	3.0 A	0.1 A	1.5%	
	V ₃ = -12.8 V	0.5 A	0.0 A	1%	
COVER-40-XBC ⁵	Metal cover kit accessory				

¹ Class II version available. Add suffix "-2" at the end of the Model Number

² Maximum current per output channel. Do not exceed total output power rating.

³ Min Load specified to meet cross regulation.

⁴ Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Electrolytic capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.

⁵ When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal	90 - 264 VAC
Input Frequency ⁶		47 to 400 Hz
Input Current	120 VAC: 230 VAC:	0.85 A max. 0.45 A max.
No Load Power	Single output models Multi output models	< 0.3 W < 0.5 W
Inrush Current	120 VAC: 230 VAC:	30 A max. 60 A max.
Leakage Current	120 VAC: 230 VAC:	< 500 μ A < 1000 μ A
Switching Frequency	Typical	67 kHz

⁶ Safety approved: 47 to 63 Hz

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Efficiency ⁷	Typical	85%
Hold Up Time	@ 120 VAC typical	>10 ms
Output Power ⁸		40 W
Line Regulation		± 0.3%
Load Regulation	V1: V2 & V3:	± 0.5% ± 5%
Transient Response	50% to 100% load change, 50/60 Hz, 50% duty cycle, 0.1 A/μs	< 10%, recovery time < 5 ms
Rise Time		< 100 ms
Set Point Tolerance	V1: V2 & V3:	± 3% ± 5%
Output Voltage Adjustment	V1	± 10%
Over Current Protection	Typical, above rating	130%
Over Voltage Protection	Typical, for V1 only	130%
Short Circuit Protection	Short term, autorecovery	
Cooling	Convection	

⁷ For ABC40-3003G efficiency is 75% typical

⁸ Derate output power linearly to 80% from 90 VAC to 80 VAC input.

4. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	Refer to derating curve, Fig. 1 -20 to 0°C start-up is guaranteed	-20 to 70°C
Storage Temperature		-40 to +70°C
Relative Humidity	Non Condensing	95%
Altitude	Operating: Non-Operating:	10,000 ft. 40,000 ft.
Reliability	MTBF according to Telcordia -SR332-Issue 3	1.87 million hours

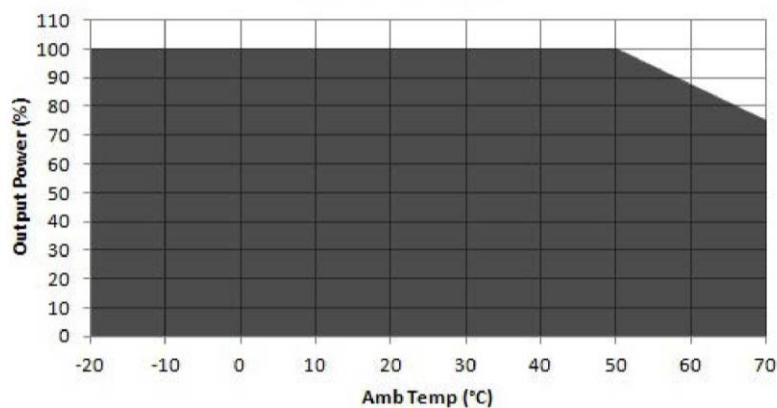


Figure 1. Derating Curve

De-rate linearly from 100% at 50°C to 75% at 70°C

5. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions	EN 55032-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55032 B	Pass
Input Current Harmonics	EN 61000-3-2	Class A
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 3, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 3, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion A & B

6. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output	4000 VAC / VDC
Safety Standards	IEC60950-1(ed.2), EN 60950-1, UL60950-1 (2nd Edition), CSA C22.2 No. 60950-1 (2nd Edition), UL 62368-1, 2nd Ed, 2014-12-01 CAN/CSA C22.2 No. 62368-1-14, (2nd Edition), Class1 SELV IEC 62368-1:2014, EN 62368-1:2014 ;A11	
Agency Approvals	Nemko, UL, C-UL	
CE mark	Complies with LVD Directive	

7. CONNECTOR & PIN DESCRIPTION

CONNECTOR	PIN	DESCRIPTION / CONDITION	MANUFACTURER / PN
AC Input Connector	J1	Pin 1 AC Line Pin 2 AC Neutral	Molex: 26-60-4030 or equivalent Mating: 09-50-3031; Pins: 08-50-0106
DC Output Connector	J2	Pin 1,2 V1 Pin 3,4 RTN Pin 5 V3 Pin 6 V2	Tyco: 640445-6 or equivalent Mating: 647402-6; Pins: 3-647409-1
Signal Connector	J3	Pin 1 +V1 Sense Pin 2 -V1 Sense	Molex: 22-23-2021 or equivalent Mating: 22-01-2021
Earth (Spade Connector)	J4		Molex: 19705-4301 Mating: 190030001

8. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	150 g (0.33 lbs.)
Dimensions	101.6 x 50.8 x 30.48 mm (4 x 2 x 1.2 inch)

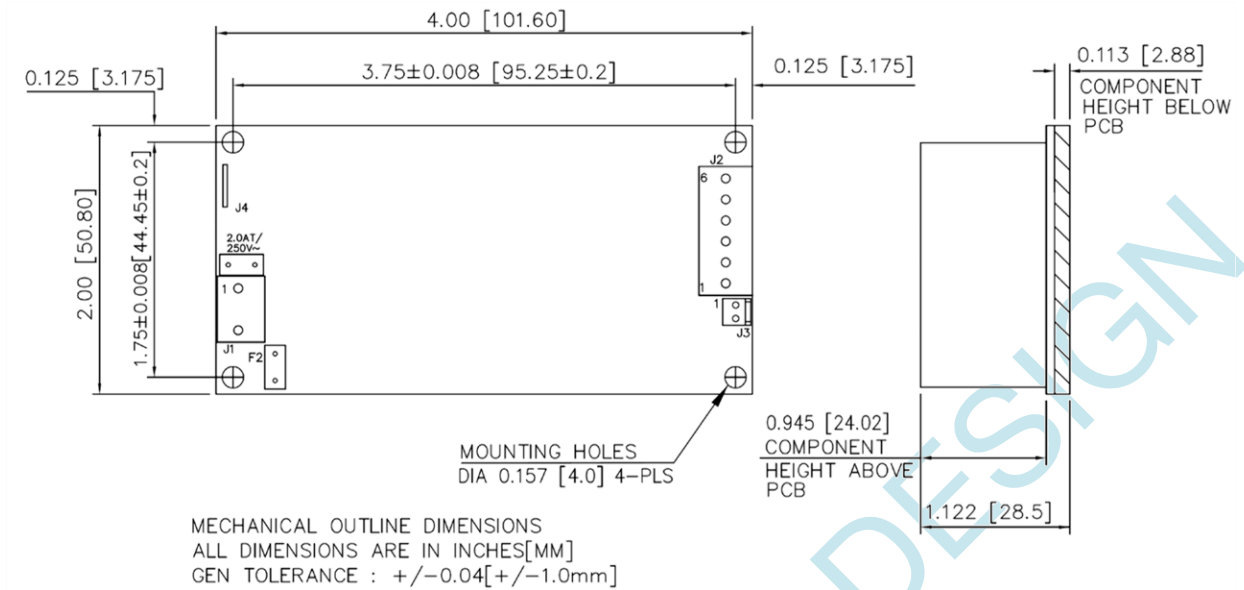


Figure 2. Mechanical Drawing ABC40-1xxxG

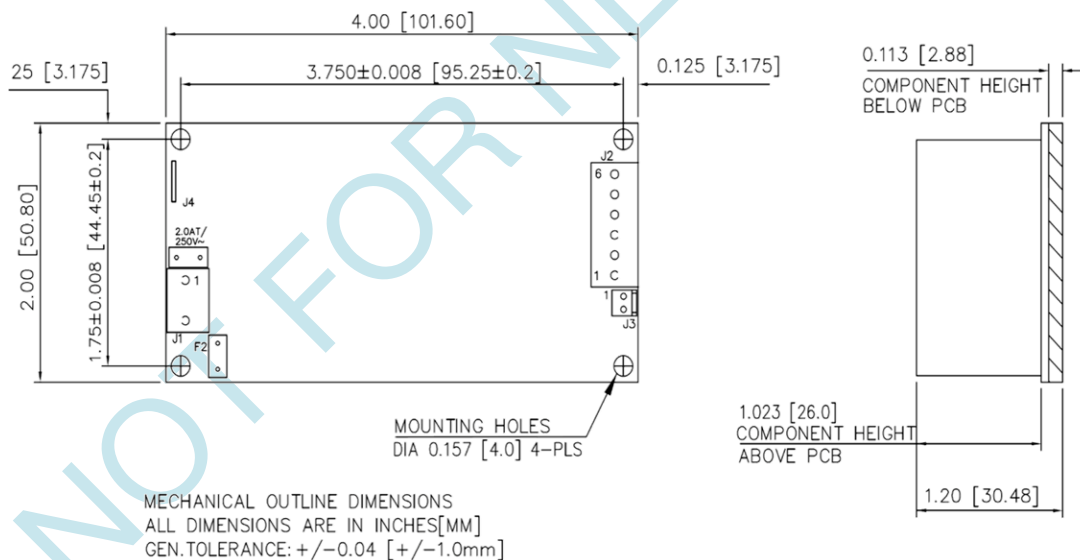


Figure 3. Mechanical Drawing ABC40-3xxxG

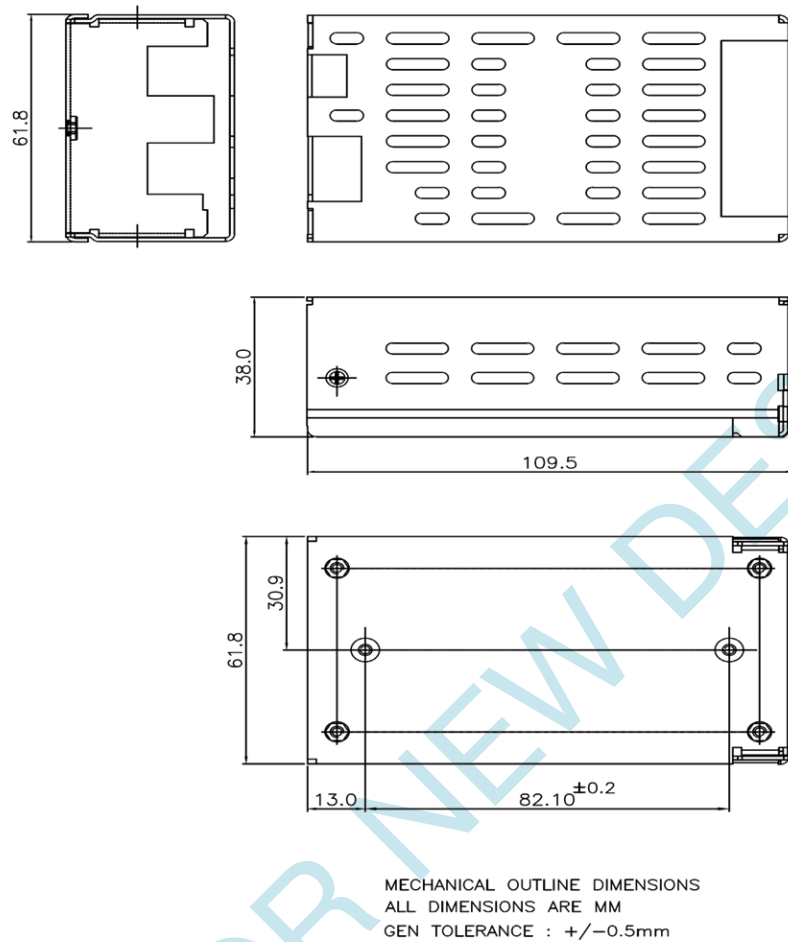


Figure 4. Mechanical Drawing with Cover Kit

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [ABC40-1012G](#) on WIN SOURCE
- ⊖ [Bel Power Solutions](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management