



THE DATASHEET OF BFCN-3491+



Ceramic

Bandpass Filter


BFCN-3491+

50Ω

2790 to 4370 MHz

The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (2790-3470 MHz)
- High rejection in upper stopband



CASE STYLE: FV1206-7

Product Overview

The BFCN-3491+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 2790 to 4370 MHz, these units offer excellent rejection over a deep stopband.

Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection peaks close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Deep stopband	Upper stopband features transmission zeroes for high rejection.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Ceramic

Bandpass Filter

50Ω

2790 to 4370 MHz

BFCN-3491+

Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

Applications

- Harmonic Rejection
- Transmitters / Receivers



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input	1W max.

Permanent damage may occur if any of these limits are exceeded.




Bottom View



Pad Connections

Input	1
Output	3
Ground	2

Functional Schematic



Electrical Specifications^{1,2} at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center Frequency	—	—	—	3489	—	MHz
Pass Band Insertion Loss	F1-F2	2790-4370	—	1.5	3.0	dB
Pass Band Return Loss	F1-F2	2790-4370	—	12	—	dB
Stop Band, Lower Insertion Loss	DC-F3	DC-2150	18	21	—	dB
Stop Band, Upper Insertion Loss	F4-F5	5950-7200	20	30	—	dB
Stop Band, Upper Insertion Loss	F5-F6	7200-10000	15	20	—	dB





1. Measured on Mini-Circuits Characterization Test Board TB-812+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
600	-42.91	-0.11
1200	-26.66	-0.24
2200	-28.41	-0.73
2600	-2.25	-15.09
3000	-0.97	-17.51
3600	-0.86	-17.76
4400	-1.17	-17.03
4500	-1.37	-14.16
4750	-2.98	-6.20
5250	-14.02	-0.85
6000	-32.75	-0.42
7000	-45.26	-0.40
8000	-25.20	-0.42
9000	-28.29	-0.37
10000	-29.03	-0.33

Specification Definition

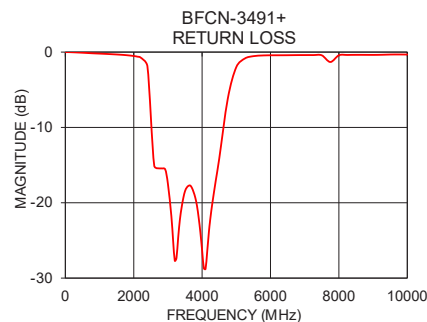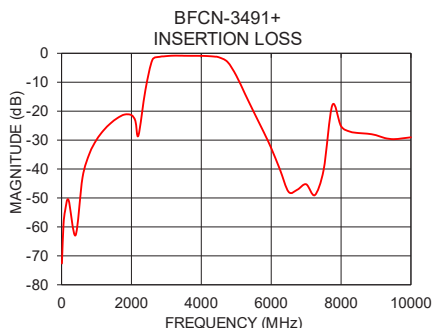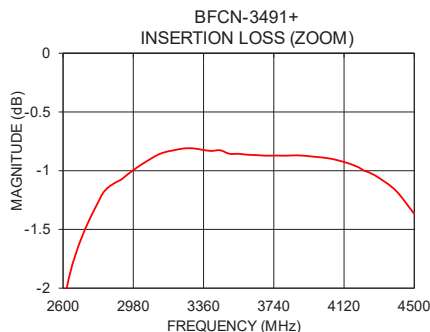


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-002304
BFCN-3491+
BK/CP/AM
200331
Page 2 of 3


Bandpass Filter

BFCN-3491+

Outline Drawing

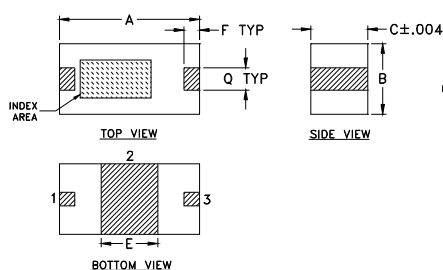

PCB Land Pattern



Product Marking: N/A


Pad Connections

Input	1
Output	3
Ground	2

Outline Dimensions (inch/mm)

A	B	C	E	F	G	H
.126	.063	.051	.051	.014	.183	.104
3.20	1.60	1.30	1.30	0.36	4.65	2.64
J	M	N	P	Q	R	Wt
.051	.063	.014	.024	.020	.039	grams
1.30	1.60	0.36	0.61	0.51	0.99	.020

Demo Board MCL P/N: TB-812+
Suggested PCB Layout (PL-439)

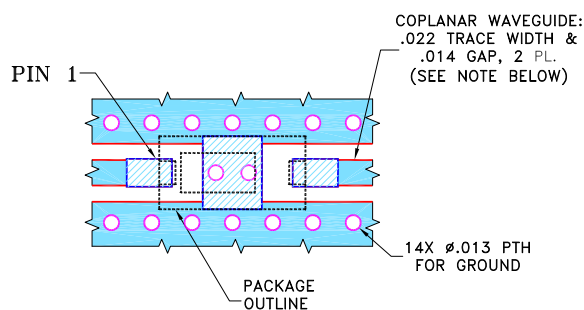

NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BFCN-3491+](#) on WIN SOURCE

 [Mini-Circuits](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management