



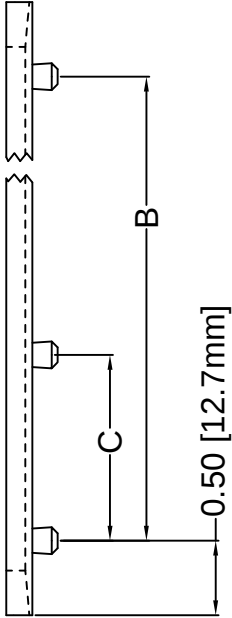


THE DATASHEET OF SDC-1100

REV.	
J	Engineering Release
K	Removed Material C

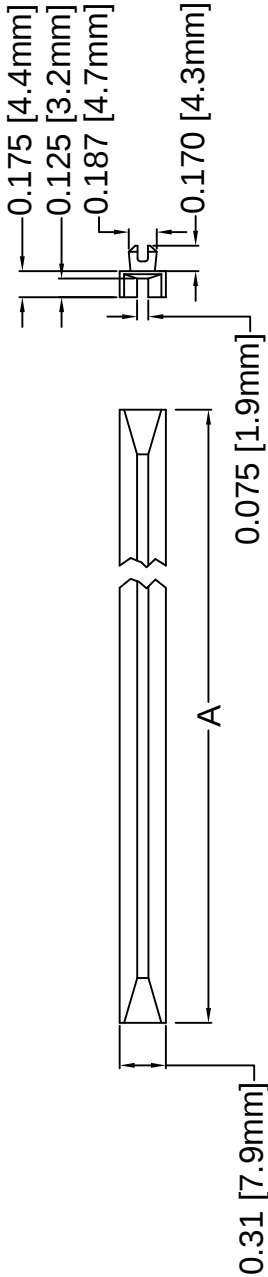

PART NO.	A ±.032 (.8)
SDC-200	2.0 (50.8)
SDC-250	2.5 (63.5)
SDC-300	3.0 (76.2)
SDC-350	3.5 (88.9)
SDC-400	4.0 (101.6)
SDC-450	4.5 (114.3)
SDC-500	5.0 (127.0)
SDC-550	5.5 (139.7)
SDC-600	6.0 (152.4)
SDC-650	6.5 (165.1)
SDC-700	7.0 (177.8)
SDC-750	7.5 (190.5)
SDC-800	8.0 (203.2)
SDC-850	8.5 (215.9)
SDC-900	9.0 (228.6)
SDC-950	9.5 (241.3)
SDC-1000	10.0 (254.0)
SDC-1050	10.5 (266.7)
SDC-1100	11.0 (279.4)

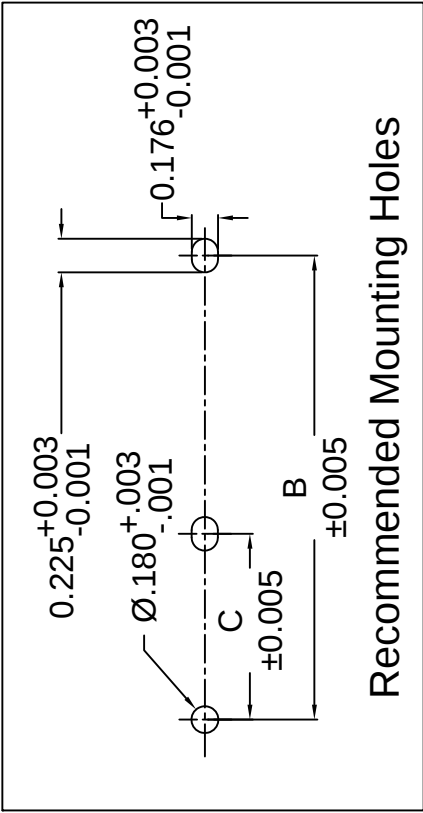

3. ALL DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: NYLON 66, 94V-2, NATURAL.
1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)	DECIMALS	ANGULAR
.X	± .1	X°
.XX	± .01	
.XXX	± .005	
DESIGNED BY:	DATE:	
D. Green	11/2	
CHECKED BY:	DATE:	
M. Chen	11/2	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SDC-1100](#) on WIN SOURCE

 [Bivar Inc.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management