



THE DATASHEET OF J107F1CS123VDC.36



Features

- UL F class rated standard
- Small size and light weight
- PC board mounting
- UL/CUL certified



Contact Data*

Contact Arrangement	1A = SPST N.O. 1B = SPST N.C. 1C = SPDT
Contact Resistance	< 50 milliohms initial
Contact Material	AgSnO ₂
Maximum Switching Power	2500VA, 420W
Maximum Switching Voltage	380VAC, 110VDC
Maximum Switching Current	20A

UL Contact Ratings					
20A Contact		20A @ 16VDC / 125VAC gp 10A @ 250VAC general purpose 1/3hp @ 125VAC / 277VAC			
20A Contact N.O.		10A @ 250VAC 85C, 100K cycles general purpose			
15A Contact		15A @ 125VAC general purpose 6A @ 277VAC general purpose			
15A Contact N.O.		15A @ 125VAC resistive, 30K cycles 4FLA, 40LRA @ 24VDC DC motor, 1000 cycles			
12A Contact		12A @ 125VAC general purpose 12A @ 28VDC general purpose			

TÜV Contact Ratings – .36W coil power only			
N.O.		6A @ 250VAC 6A @ 28VDC	
N.C.		6A @ 250VAC 6A @ 28VDC	

Coil Data*

Coil Voltage VDC		Coil Resistance Ω +/- 10%			Pick Up Voltage VDC (max) 75% of rated voltage	Release Voltage VDC (min) 10% of rated voltage	Coil Power W	Operate Time ms	Release Time ms
Rated	Max	.36W	.45W	.80W					
3	3.9	25	20	11	2.25	.3	.36 .45 .80	10	5
5	6.5	70	56	31	3.75	.5			
9	11.7	225	180	101	6.75	.9			
12	15.6	400	320	180	9.00	1.2			
24	31.2	1600	1280	720	18.00	2.4			
48	62.4	6400	5120	2880	36.00	4.8			

General Data*

Electrical Life @ rated load	100K cycles, average
Mechanical Life	10M cycles, average
Insulation Resistance	100M Ω min. @ 500VDC initial
Dielectric Strength, Coil to Contact Contact to Contact	1500V rms min. @ sea level initial 750V rms min. @ sea level initial
Shock Resistance	100m/s ² for 11 ms
Vibration Resistance	1.50mm double amplitude 10~40Hz
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +155°C
Solderability	260°C for 5 s
Weight	9.5g


* Values can change due to the switching frequency, desired reliability levels, environmental conditions and in-rush load levels. It is recommended to test actual load conditions for the application. It is the user's responsibility to determine the performance suitability for their specific application. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.

Ordering Information

1. Series	J107F	1C	S	12	12VDC	.36
J107F						
2. Contact Arrangement 1A = SPST N.O. 1B = SPST N.C. 1C = SPDT						
3. Sealing Option S = Sealed						
4. Contact Rating 12 = 12A 15 = 15A 20 = 20A (20Amp available in .45 or .80 watt coil only)						
5. Coil Voltage 3VDC 5VDC 9VDC 12VDC 24VDC 48VDC						
6. Coil Power .36 = .36W .45 = .45W .80 = .80W						


Dimensions

Units = mm

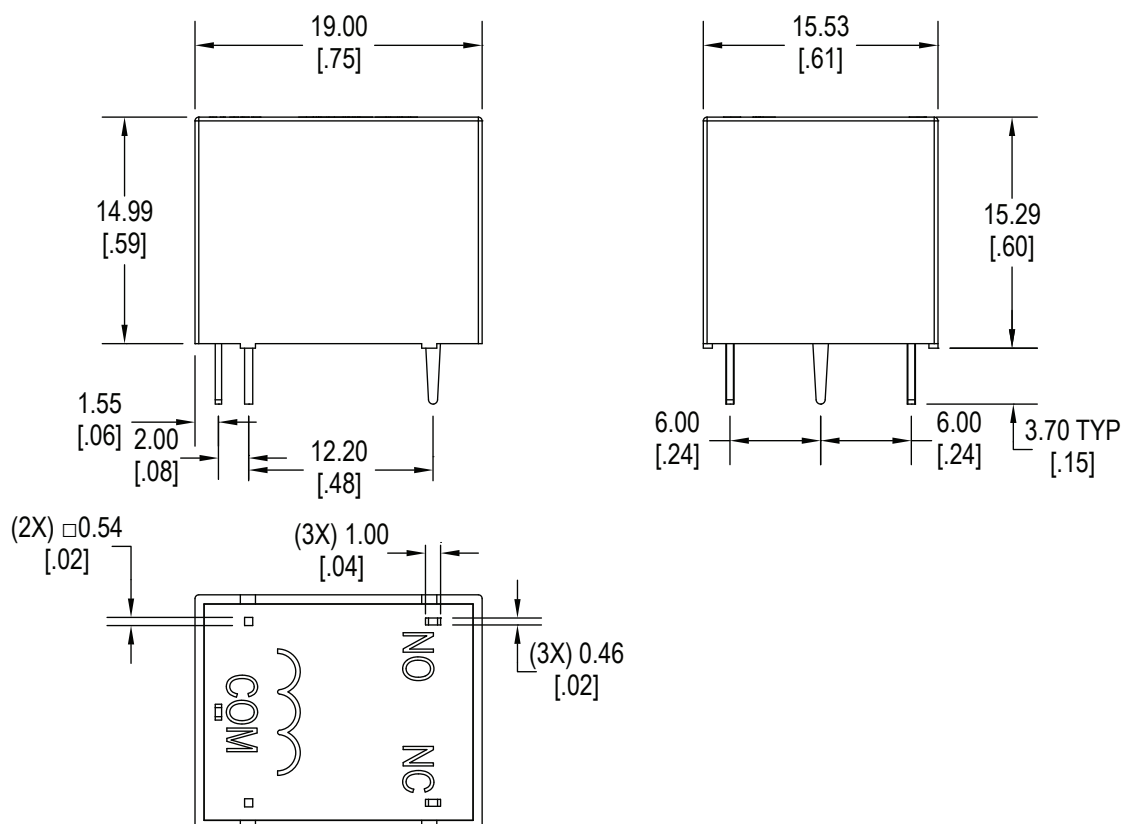

Schematics & PC Layouts

Bottom Views

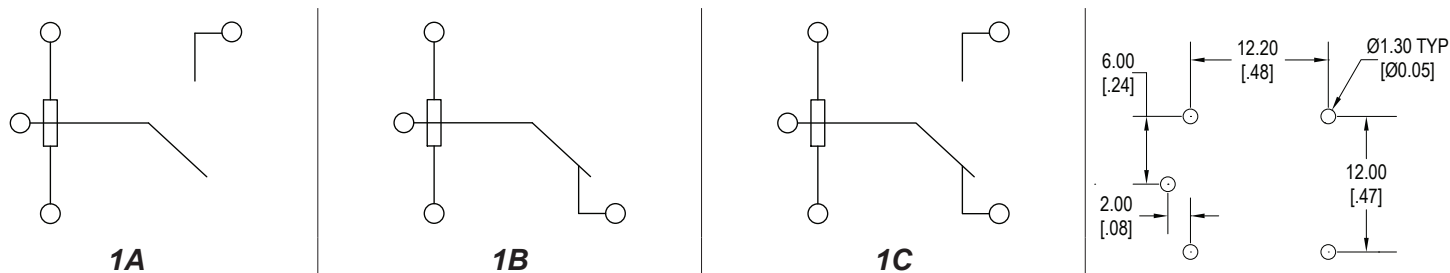

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View J107F1CS123VDC.36](#) on WIN SOURCE

 [CIT Relay & Switch](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management