





THE DATASHEET OF CC4V-T1A-32.768KHZ-9PF-20PPM-TA-QA

CC4V-T1A

Tuning Fork Crystal 30 kHz – 1.0 MHz

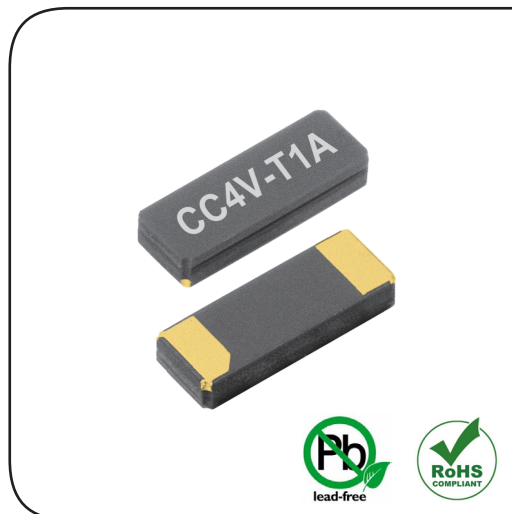

DIMENSIONS

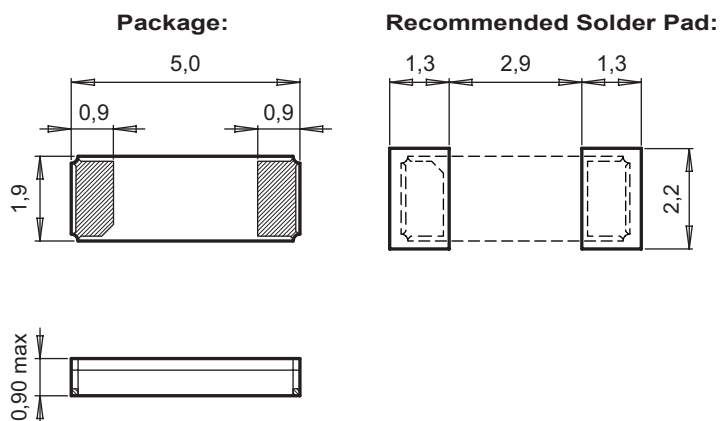

All dimensions in mm typical

APPLICATIONS

Metering
Industrial
Automotive
Health Care
Medical Implantable
Harsh Environments

DESCRIPTION

The CC4V-T1A is a low frequency SMT Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed ceramic package with ceramic lid.

CC4V-T1A is compatible with other suppliers' same footprint crystals.

FEATURES

Mature product for harsh environments.
Outstanding hermetic sealing with gold-tin preform.
High stability and low aging guaranteed by hermetic sealing.
Available for extended operating temperature range.
High shock and vibration resistant.
100% Pb-free, RoHS-compliant.
Automotive qualification according to AEC-Q200 available.

ELECTRICAL CHARACTERISTICS AT 25°C

Frequency Range	F _L	30–200	201–560	1'000	kHz
Load capacitance ¹⁾	C _L	6.0 7.0 9.0 10.0 12.5	9.0	7.0 10.0	pF
Frequency tolerance ²⁾	ΔF/F	±20	±100	±100	ppm
	ΔF/F	±100	±250	±500	ppm
Drive level max.	P	1.0			μW
Insulation resistance min.	R _i	500			MΩ
Aging first year max.	ΔF/F	±3			ppm

Standard Frequencies ³⁾	F _L	32.768	200.000	1'000	kHz
Series resistance typ./max.	R _S	50 / 65	3.2 / 5.0	0.5 / 1.0	kΩ
Motional capacitance typ.	C ₁	2.1	2.1	2.1	fF
Static capacitance typ.	C ₀	1.2	1.3	1.0	pF
Turnover temperature	T ₀	25 ±5	30 ±5	32 ±5	°C
Frequency vs. temperature	ΔF/F ₀	−0.035 ppm/°C² (T - T ₀)² ±10%			ppm

1) Other load capacitances on request.

2) Tighter frequency tolerances on request.

3) Other standard frequencies, see below.

STANDARD FREQUENCIES

Frequencies			
32.768 kHz	38.400 kHz	40.000 kHz	100.000 kHz
128.000 kHz	153.600 kHz	200.000 kHz	1.0000 MHz
Other frequencies on request			

ENVIRONMENTAL CHARACTERISTICS

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
TB Extended oper. temp. range		-40 to +125°C	
TC Extended oper. temp. range		-55 to +125°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	±5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10–2000 Hz	±5 ppm

TERMINATIONS AND PROCESSING

Type	Termination	Processing
CC4V-T1A	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
CC4V-T2A	SnPb plated pads available only on request	

ORDERING INFORMATION

C C 4 V - T 1 A 32.768 kHz 12.5 pF ±20 ppm TA QC	
Ceramic package Ceramic lid Package size 4 = 5.0 x 1.9 x 0.90 mm Tuning fork SMT Package Pads 1 = Au flashed pads 2 = SnPb plated pads Pads on both ends	Frequency F_L Load capacitance C_L 6.0 pF, 7.0 pF 9.0 pF 10.0 pF 12.5 pF Other C_L on request Frequency tolerance ±20 ppm, ±100 ppm ±250 ppm, ±500 ppm Tighter freq. tolerances on request Temperature range TA = -40 to +85°C (Standard) TB = -40 to +125°C TC = -55 to +125°C Qualification QC = Commercial Grade (Standard) QA = Automotive Grade AEC-Q200 QM = Medical Grade
A unique part number will be generated for each product specification, i.e.:	
20xxxx-MG02	2'000 pcs (in 12 mm tape on 7" reel)
20xxxx-PG10	10'000 pcs (in 12 mm tape on 13" reel)

All specifications subject to change without notice.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [CC4V-T1A-32.768KHZ-9PF-20PPM-TA-QA](#) on WIN SOURCE
- ⊖ [Micro Crystal AG](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management