



THE DATASHEET OF
3570-1419-054

Part Number: 3570 1419 Series

Instrumentation Grade Mini SIP - 1 Form A

15 Watt

Product Data Sheet

PICTURE



FEATURES

- High Reliability Instrumentation Grade reed switch with sputtered Ruthenium contacts.
- 15 W Mini SIP (40% smaller than 3570-1333 series)
- Magnetic shield-reduces interaction (option).
- Coil suppression diode protects coil drive circuits (option).
- High Insulation Resistance: $10^{12} \Omega$ MIN
- High board density.
- Molded thermoset industry standard package.
- Hermetically sealed contacts for long life.
- UL File E358613

✓ **RoHS Compliant**


ORDERING INFORMATION

Series	Coil	Options
3570.1419.	05	1 = no diode
	12	2 = internal magnetic shield
		3 = with diode
		4 = internal magnetic shield + diode


Part Number Example: 3570.1419.xxx

3570.1419.051 = 5 volt coil, no diode

SCHEMATIC

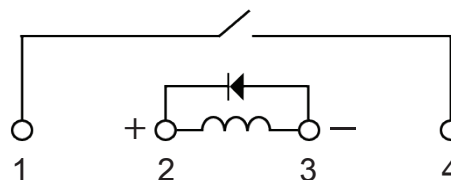

DIMENSIONS

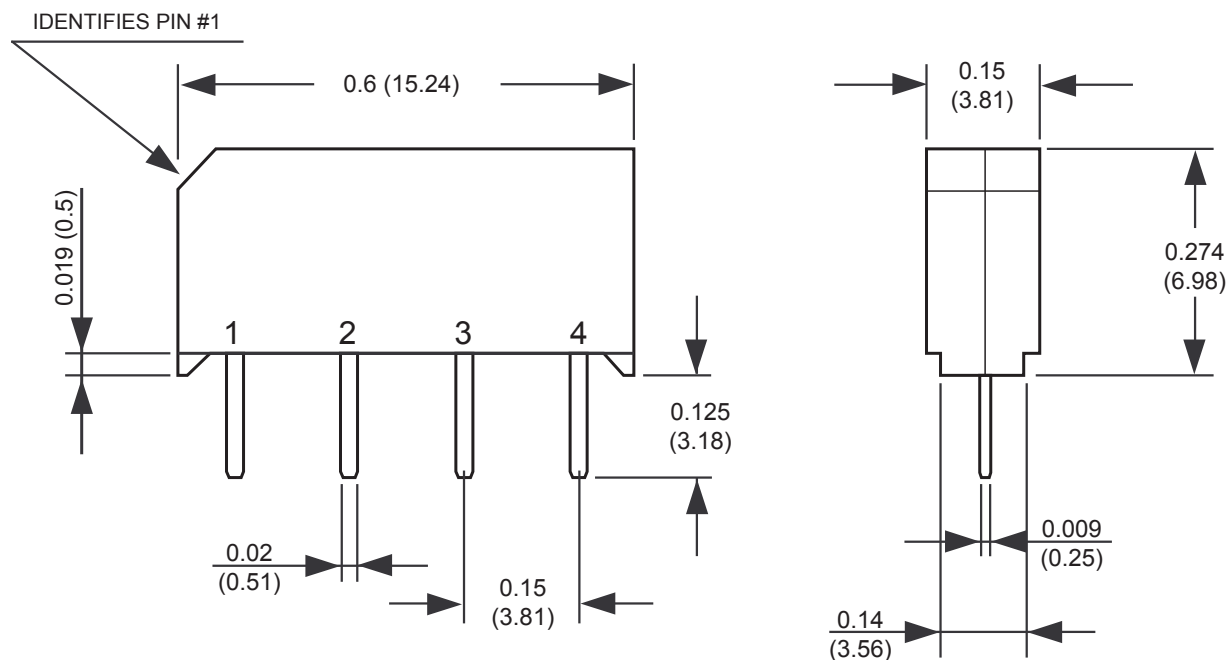

Drawings not to scale.
All dimensions in inches (mm) nominal.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: +32 (0)12 390400 - Comus Europe Ltd (Assembletech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

Part Number: 3570 1419 Series

Instrumentation Grade Mini SIP - 1 Form A

15 Watt

Product Data Sheet

COIL DATA-STANDARD TYPE 1 FORM A (at 20°C)

NOMINAL VOLTAGE DC $\pm 10\%$ [V]	COIL RESISTANCE $\pm 10\%$ (Ω)	MAX OPERATE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX COIL VOLTAGE (VDC)
5	500	3.75	0.4	7
12	1000	9.0	1.0	16

CONTACT RATING

Max Switching Power	15 W
Max Switching Voltage	200 VDC
Max Switching Current	1 A
Max Carry Current	1.25 A

SPECIFICATION

Contact Resistance (Initial)	MAX 150 m Ω
Operate Time - including bounce (Typical)	0.35 ms (At Nominal Voltage)
Release Time (Typical)	0.1 ms
Insulation Resistance @ 100V, 20°C, 40% RH (MIN)	$10^{12} \Omega$
Dielectric Strength (MIN)	Between Open Contacts 200 V DC / peak AC Between Coil to Contacts 1500 V DC / peak AC
Capacitance Between Open Contacts (Typical)	0.7 pF
Vibration	20G
Shock Resistance	50G
Operating Temperature	-40° +85°C
Storage Temperature	-40° +100°C
Life Expectancy of Electrical	1000 x10 ⁶ ops (1 VDC, 10mA)

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtech) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 3570-1419-054](#) on WIN SOURCE

 [Comus International](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management