

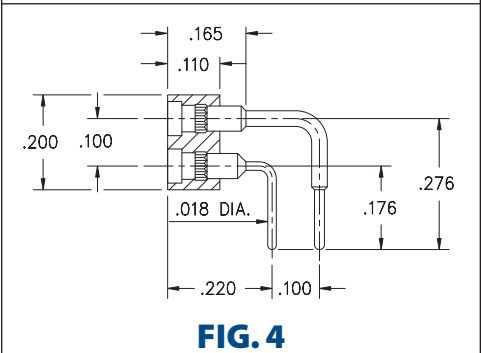
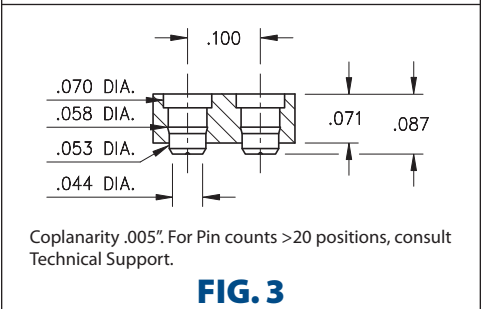


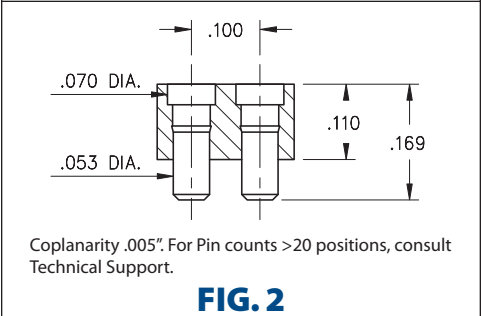


THE DATASHEET OF
419-10-216-30-041000

SPRING-LOADED CONNECTORS

SERIES 419, 499 • .100" GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • DOUBLE ROW STRIPS

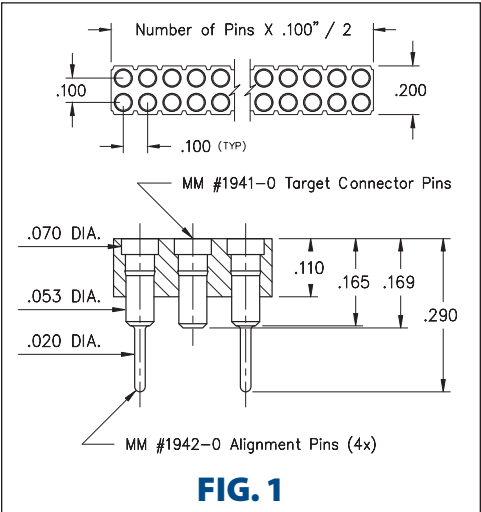

- Series 419 and 499 Spring Target Connectors, supplied in double row strips. Available in SMT and right angle through-hole termination configurations
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a flat face for making contact with our standard .042" dia. spring pin plungers
- Target connectors use MM #1940, #1941/1942, #1953 and #1954 pins. See pages 218 & 223.3 for details
- Insulators are high temperature thermoplastic

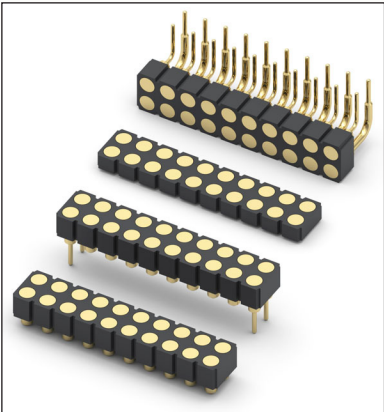

ORDERING INFORMATION

FIG. 1	Series 419...042	Surface Mount w/ Alignments Pins
	419-10-2	-30-042000 Specify number of pins 06-72
FIG. 2	Series 419...041	Surface Mount
	419-10-2	-30-041000 Specify number of pins 04-72
FIG. 3	Series 419...054	Low Profile Surface Mount
	419-10-2	-30-054000 Specify number of pins 04-72
FIG. 4	Series 499...008	Right Angle Solder Tails
	499-10-2	-10-008000 Specify number of pins 02-64
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating	10 	10 μ" Au



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [419-10-216-30-041000](#) on WIN SOURCE
- ⊖ [Mill-Max Manufacturing Corp.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management