





THE DATASHEET OF ERA-3AEB103V

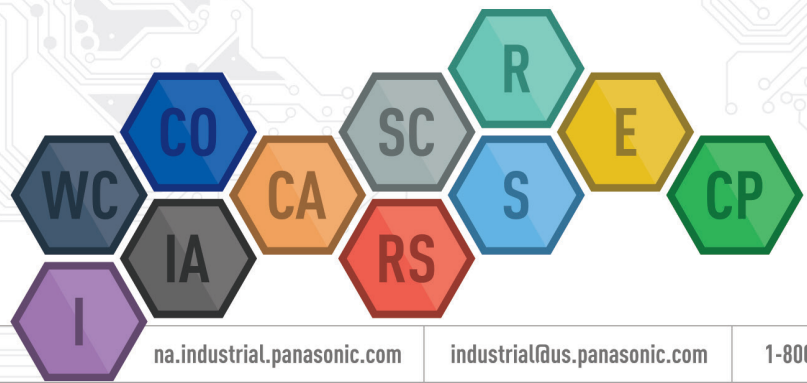

Line Extension

ERA Series Thin-Film Chip Resistors

Panasonic, a world leader in Resistive Products, is pleased to announce the expansion of the **ERA Series Thin-Film Chip Resistors**! These industry leading thin-film resistors have been expanded to include new offerings in 10ppm and 15ppm TCR, as well as 0402 inch (0.063W) and 1206 (0.25W) case sizes. The expanded values provide more specification options and higher performance accuracy to design engineers. Also introduced is a 0.05% tolerance option ("ERA-xxxW" type) for the 0402 size. Features include high reliability at high temperature and high humidity as well as high accuracy, low current noise, and excellent linearity. AEC-Q200 applicable, these thin-film chip resistors are even usable within demanding automotive applications.



Features

- 85 °C 85 %RH rated load
- Category temperature range : -55 to +155 °C
- 10ppm, 15ppm, and 25ppm accuracy, 0.1% and 0.25% Tolerance
- Available in All Major Case Sizes
- RoHS/REACH151 Compliant

Benefits

- High Reliability @ High Temperature & Humidity
- High-Accuracy and Low TCR
- Size Options are Expanded to Include All Major Case Sizes

Applications

- Smartphones/Tablet PC
- Test and Measurement
- Automotive ECU, BMS, Divider Circuit

Industries

- Telecommunications
- Industrial Electronics
- Automotive
- Home Appliance

Part Number Information

ERA

1A

E

B

1020

V

Series

Case Size

Temp. Coefficient

Resistance Tolerance

Resistance

Packaging

Code	Size	Power Rating
1A	0201	0.05W
2A	0402	0.063W
3A	0603	0.1W
6A	0805	0.125W
8A	1206	0.25W

Code	TCR
R	$\pm 10 \times 10^{-4} / ^\circ\text{C}$
P	$\pm 15 \times 10^{-4} / ^\circ\text{C}$
E	$\pm 25 \times 10^{-4} / ^\circ\text{C}$
H	$\pm 50 \times 10^{-4} / ^\circ\text{C}$
K	$\pm 100 \times 10^{-4} / ^\circ\text{C}$

Code	Tolerance
W	$\pm 0.05\%$
B	$\pm 0.1\%$
C	$\pm 0.25\%$
D	$\pm 0.5\%$

Code	Packaging	Type
C	Pressed Carrier Tape 2mm Pitch, 15000 pcs	ERA1A
X	Punched Carrier Tape 2mm Pitch, 10000 pcs	ERA2A
V	Punched Carrier Tape 4mm Pitch, 5000 pcs.	ERA3A ERA6A ERA8A

Resistance Value

Consist of three figures for E24 series resistance value or four figures for E96 resistance value. The first two digits (three digits for E96) are significant figures of resistance and the last digit denotes number of zeros following.

Example: 102 → 1 kΩ, 1051 → 1.05 kΩ

For detailed specification information on the ERA Series, visit our website at:
na.industrial.panasonic.com/products/resistors-inductors/resistors



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [ERA-3AEB103V](#) on WIN SOURCE

 [Panasonic](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management