




THE DATASHEET OF 2.4-LA-PP



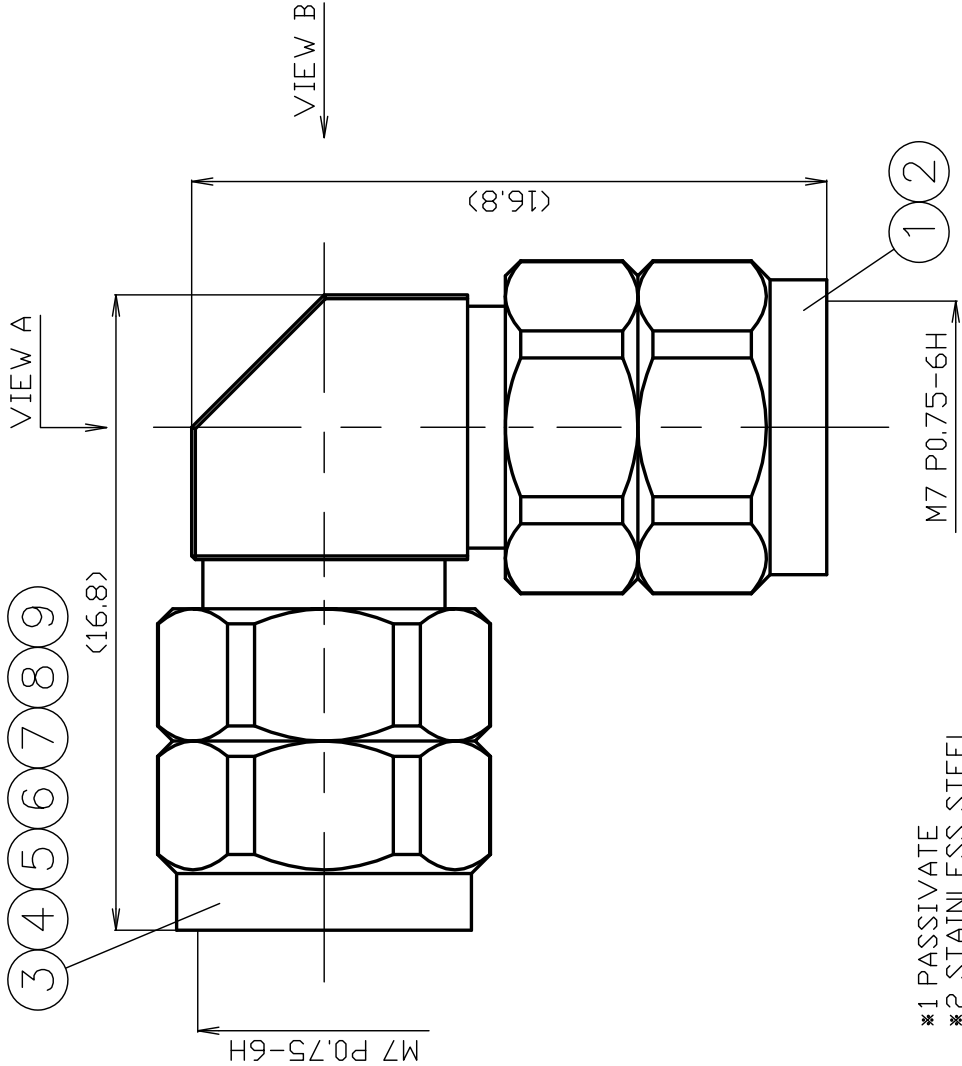

※1 PASSIVATE
※2 STAINLESS STEEL
※3 BERYLLIUM COPPER

9	BUSHING	※2	5	※1	
8	CENTER PIN C	※3	1	Au	
7	INSULATOR B	PEI	1	--	
6	CENTER PIN B	※3	1	Au	
5	INSULATOR A	PEI	1	--	
4	CENTER PIN A	※3	1	Au	
3	BODY	※2	1	※1	
2	HOLDING RING	※3	2	Ni	
1	COUPLING NUT	※2	2	※1	
NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK

DRAWN	INSPECTED	APPR
井 出	檜 澤	1
'24.05.23	'24.05.23	'24.05.23
PROJECTION	1000	70-
DATE	2024.05.23	

PRODUCT SPECIFICATIONS

Part number: 2.4-LA-PP

No. 1042555

Drawing number: U-1046353

Nominal 1 Standard IEC 61169-40
 2 Voltage rating AC 160V
 3 Rated frequency 50GHz
 4 Impedance 50Ω
 5 Operating temperature range -40°C ~ +85°C



	Test Items	Test Method/Value	Remarks
1	ELECTRICAL	Insulation resistance	1000MΩ(Min.) at DC 500V
2		Withstanding voltage	1 minute at AC 500V
3		Contact resistance	Inner conductor : 4.0mΩ(Max.) Outer conductor : 2.5mΩ(Max.)
4		V.S.W.R	DC~50GHz : 1.35(Max.)
5	MECHANICAL	Compatibility	No defects or abnormalities Connecting with a standard-compliant connector
6		Tensile strength of coupling mechanism	450N At axial tensile force
7		Coupling torque	0.8~1.1N·m
	OTHERS		

※The structural shape is shown in the attached drawing (Drawing number:U-1046353)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
 24.05.23 村	 24.05.23 山本	 24.05.23 檀澤	 24.05.23 井出

GKQM-24

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [2.4-LA-PP](#) on WIN SOURCE

 [TYCLON](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management