




THE DATASHEET OF K292J-SMAJ

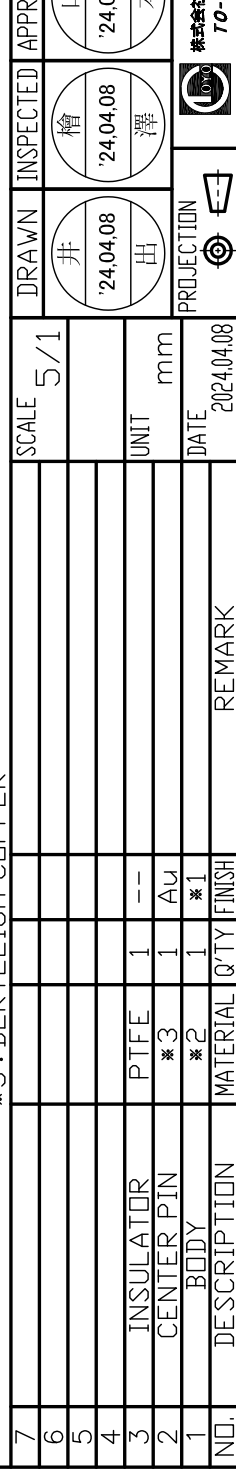

PRODUCT SPECIFICATIONS

Part number: K292J-SMAJ

No. 1042217

Drawing number: K-1075681

Nominal 1 Standard IEC 61169-35, 60169-15

2 Voltage rating AC 500V

3 Rated frequency 26.5GHz

4 Impedance 50Ω

5 Operating temperature range -40°C~+85°C



	Test Items	Test Method/Value	Remarks
1	ELECTRICAL	Insulation resistance	5000MΩ(Min.) at DC 500V
2		Withstanding voltage	1 minute at AC 1000V
3		Contact resistance	Inner conductor : 3.0mΩ(Max.) Outer conductor : 2.0mΩ(Max.)
4		V.S.W.R	DC~26.5GHz : 1.3(Max.)
5	MECHANICAL	Compatibility	No defects or abnormalities Connecting with a standard-compliant connector
6		Tensile strength of coupling mechanism	270N At axial tensile force
7		Center contact retaining force	0.40N(Min.)(2.92mm) 0.28N(Min.)(SMA) With a standard pin gauge
8		Durability	500 matings
9		Coupling torque	0.8~1.1N·m

※The structural shape is shown in the attached drawing (Drawing number:K-1075681)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
三 24.04.08 村	山 24.04.08 本	檜 24.04.08 澤	井 24.04.08 出

GKQM-24

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View K292J-SMAJ](#) on WIN SOURCE

 [TYCLON](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management