



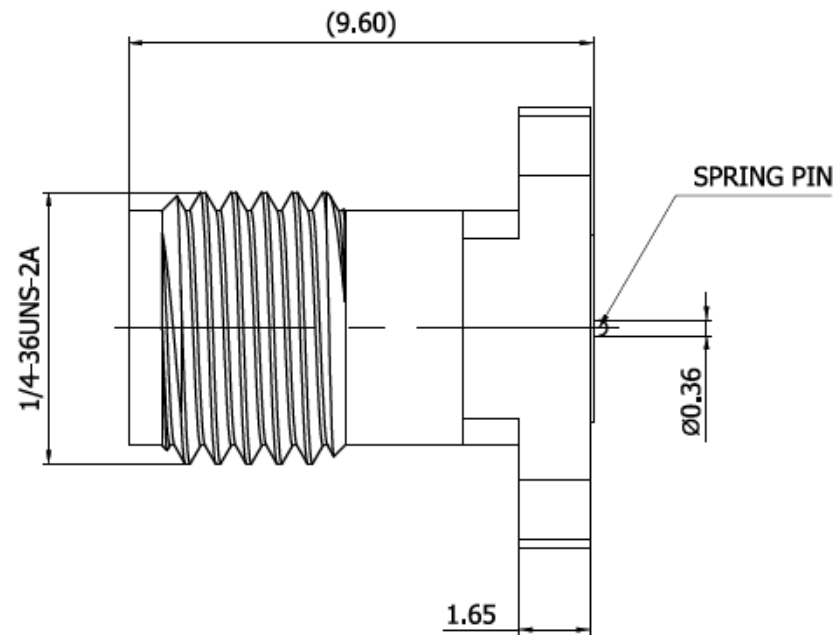

THE DATASHEET OF K292-R-SMT2(SL)

Reference Drawing

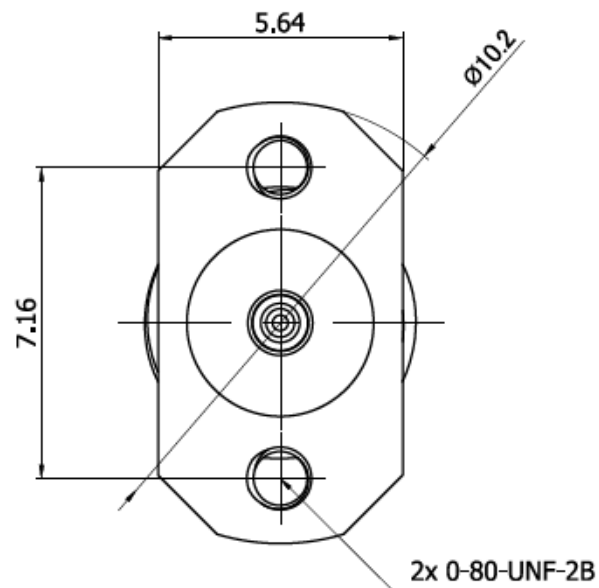


MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300
CONTACT: BERYLLIUM COPPER PER ASTM B196.
ALLOY NO. UNS C17300
INSULATOR: PEI

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 40 GHz
VSWR: ≤1.30



R o H S Compliant $Cd \leq 75ppm$

REMARKS BRASS: $Cd \leq 75ppm$ PHOSPHOR
BRONZE: $Pb < 4wt\%$

SCALE
NONE

UNIT
mm

DATE
2025/02/13

TYCLON

PROJECTION
⊙

TO-CONNE CO.,LTD

PART NUMBER

K292-R-SMT2(SL)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View K292-R-SMT2\(SL\)](#) on WIN SOURCE

 [TYCLON](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management