




THE DATASHEET OF BF26214-20B

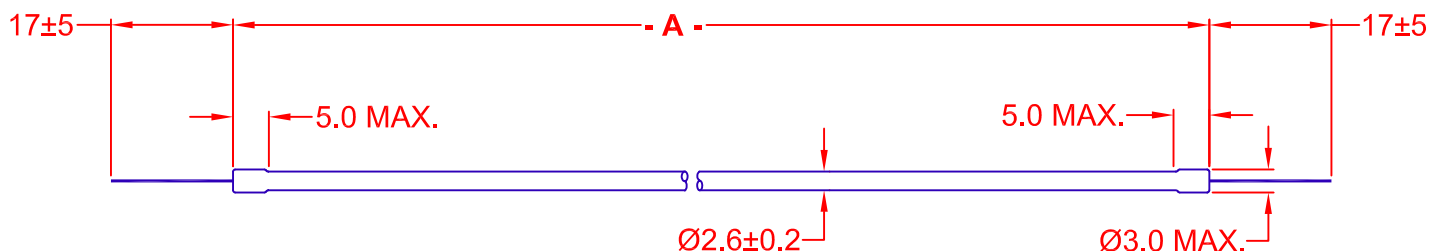

JKL PART NUMBER	-A- LENGTH	LCD HIGH OUTPUT WHITE RGB COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms) TYP.	OPERATING LAMP VOLTAGE VL (Vrms) TYP.	OPERATING LAMP CURRENT IL (mA rms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) MINIMUM
BF2698-20B	98±2.0	5,400°k x = .336 y = .353	690 @ 0°C	275	5 ± 1	30,000 TYP.	20,000.
BF26188-20B	188±3.0		1115 @ 0°C	405			
BF26214-20B	214±2.0		1150 @ 0°C	460			
BF26171-20B	171±3.0		957@25°C	390@25°C			
BF26285-20B	285±1.5		1525 @ 0°C	610			
BF26318-20B	318±1.5		1710 @ 0°C	685			
BF26360-20B	360±1.5		1940 @ 0°C	775			

NOTES:

* RATED LIFE IS DEFINED AS THE POINT WHICH INTENSITY BECOMES 50% OF THE INITIAL RATING.

RATING AT 25°C UNLESS OTHERWISE SPECIFIED.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/- REF.		JKL COMPONENTS CORPORATION						
F	ADD PART NO. BF26171-20B	1/20/10	DRAWN BY L. WENGSTROM	APPV'D BY L.R.	DATE 1/20/10	TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP							
E	RATED LIFE HRS MINIMUM HEADING & 20,000	8/5/09				SIZE A FSCM NO. 55335 DRAWING NO. BF26-20B							
D	WIRE LENGTH TOLERANCE CHANGE	3/25/08											
C	BF26285-20B LENGTH TOLERANCE CHANGE	2/3/06											
B	ADD PART BF2698-20B	2/1/04											
A	ELECTRICAL CHNG. & ADD BF26318 & BF26360	10/20/04											
	RELEASED TO CAD MULTI LIST	8/14/03				SCALE		RELEASED DATE		REVISION DATE		REV. NO.	SHEET
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			NONE		8/14/03		1/20/10		F	1 OF 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [BF26214-20B](#) on WIN SOURCE
- ⊖ [JKL Components Corp.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management