







THE DATASHEET OF GCLP37M37F

SPECIFICATIONS:

MATERIALS:
HOUSING: PBT, UL94 V-0
CONTACTS: GOLD FLASH PLATED BRASS
SHELL: TIN PLATED STEEL

ELECTRICAL:
RATED CURRENT: 5A
WORKING VOLTAGE: 250V
INSULATION RESISTANCE: 1000 MOhms MIN.
CONTACT RESISTANCE: 15 mOhms MAX.

ENVIRONMENT:
OPERATING TEMPERATURE: -55°C TO +105°C

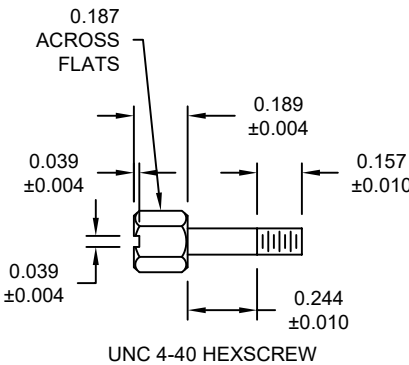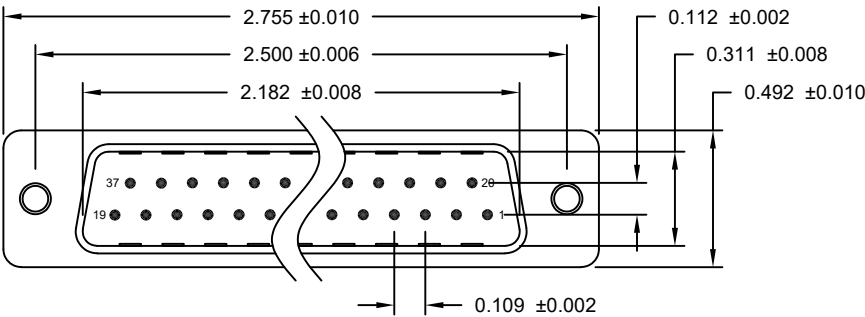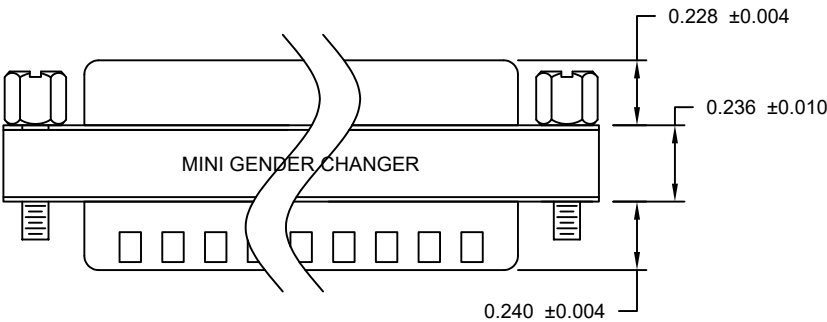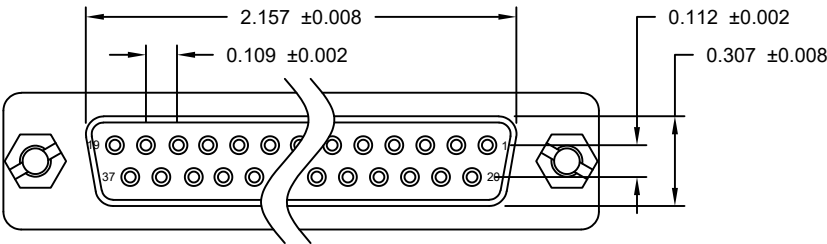

37-PIN MALE		37-PIN FEMALE
1	---	1
2	---	2
3	---	3
~		
36	---	36
37	---	37
SHELL	---	SHELL
— PIN OUT —		

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
10/12/2007

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET 1 OF 1

REV 4

DWG NO. GCLP37M37F

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [GCLP37M37F](#) on WIN SOURCE

 [NorComp Inc.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management