



THE DATASHEET OF IDSS-14-D-22.00-R


—BXX
BREAKOUT

Diagram illustrating a cable assembly configuration. The diagram shows a cable with a central section labeled "CAP" and a section labeled "BROWN WIRE". Dimensions are indicated: a length of $3'' \pm 1''$ and a distance of $[76 \pm 25]$. A cable labeled "XX" is shown at an angle, with a dimension of 10 ± 1 indicated. The diagram is associated with the following text:

IDSS: SINGLE
IDSD: DOUBLE

XX INDICATES NO. OF CONDUCTORS
IDSS-XX-S-XX-BXX
XX INDICATES NO. OF CONDUCTORS
IDSS-XX-D-XX-BXX:
XX INDICATES NO. OF POSITIONS
IDSS-XX-S-XX-BXX:
XX INDICATES NO. OF POSITIONS

—O
OUTSIDE REVERSED
NOT AVAILABLE WITH —R & —M

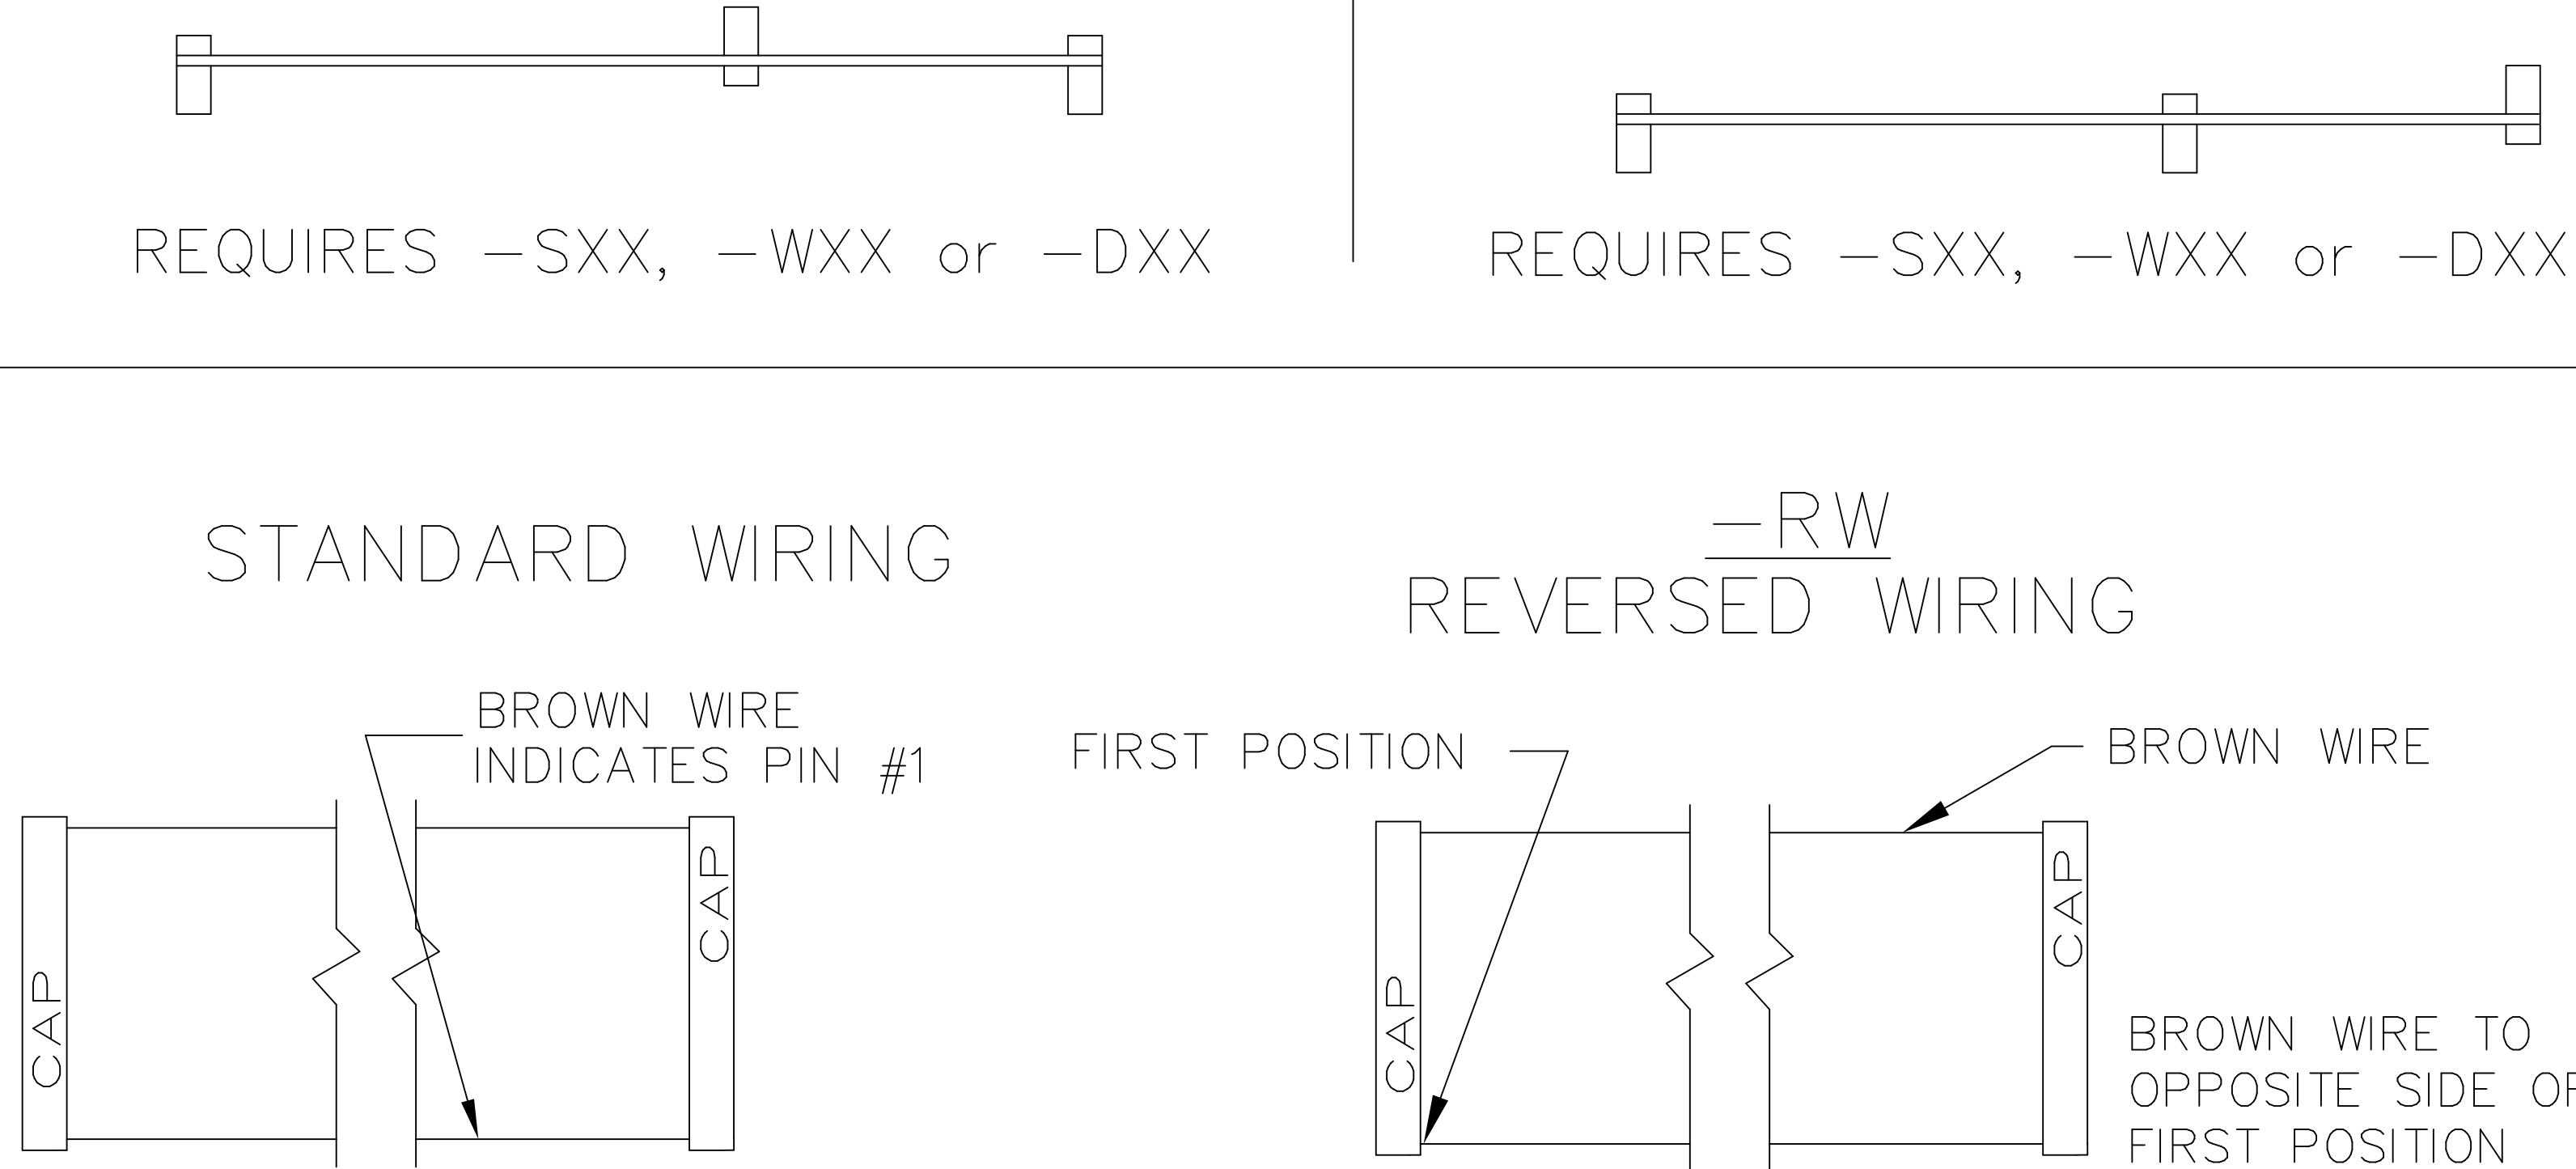

NOTE

OPTION -SXX WHEN MATING DOUBLE ROW CONNECTOR WITH 2 SINGLE ROW CONNECTORS, THE OUTER MOST SINGLE WILL BE CONNECTED TO CONNECTOR #1 AND THE INSIDE SINGLE TO CONNECTOR #2.

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

IDSX-XX-X-XX-XXX-XXX
SHEET 2 OF 2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View IDSS-14-D-22.00-R](#) on WIN SOURCE

 [Samtec Inc.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management