



THE DATASHEET OF SD53-4R7-R

SD53

Low profile shielded power inductors



Product description

- Octagonal shape utilizes board space
- Shielded drum core
- Inductance range from 1.1 uH to 100 uH
- Current range from 0.44 A to 4.8 A
- 5.7 mm x 5.2 mm footprint surface mount package in a 3.0 mm height
- Ferrite core material
- Halogen free, lead free, RoHS compliant

Applications

- Desktop computers
- Notebook and laptop regulators
- LED and White LED drivers
- Digital cameras, media devices
- Battery power systems

Environmental Data




- Storage temperature range (component): -40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C (Ambient plus self temperature rise)
- Solder reflow temperature: J-STD-020D compliant



Part Number ⁵	OCL1 (μH) ±20%	Part marking	I _{rms} ² (A)	I _{ant} ³ (A)	DCR (Ω) typical @ 20 °C	DCR (Ω) maximum @ 20 °C	K-factor ⁴
SD53-1R1-R	1.10	A	3.25	4.80	0.017	0.020	48
SD53-2R0-R	2.00	B	2.64	3.30	0.023	0.027	35
SD53-3R3-R	3.30	C	2.26	2.60	0.029	0.034	28
SD53-4R7-R	4.70	D	2.01	2.10	0.039	0.045	21
SD53-6R8-R	6.80	E	1.65	1.85	0.059	0.068	20
SD53-100-R	10.0	F	1.41	1.40	0.077	0.090	15
SD53-150-R	15.0	G	1.10	1.10	0.122	0.142	12
SD53-220-R	22.0	H	0.81	0.94	0.179	0.208	10
SD53-330-R	33.0	I	0.75	0.76	0.221	0.257	8
SD53-470-R	47.0	J	0.64	0.64	0.303	0.352	7
SD53-680-R	68.0	K	0.52	0.58	0.452	0.525	6
SD53-101-R	100	L	0.44	0.45	0.689	0.801	5


1. 1. Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.1 Vrms, 0.0 Adc.
2. Irms: DC current for an approximate ΔT of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125 °C under worst case operating conditions verified in the end application
3. Isat: Peak current for approximately 30% rolloff @ 25 °C.
4. K-factor: Used to determine B p-p for core loss (see graph). $B_{p-p} = K^*L^* \Delta I$, B p-p(mT), K: (K factor from table), L: (Inductance in uH), ΔI (Peak to peak ripple current in Amps).
5. Part Number Definition: SD53-xxx-R
SD53 = Product code and size; -xxx = Inductance value in uH; R = decimal point;
If no R is present then third character equals the number of zeros.
-R suffix = RoHS compliant.

Diagram of a 53 pin connector. The connector is shown in a perspective view. The top surface is labeled "53". The side surface is labeled "53". The bottom surface is labeled "53". The dimensions are indicated as 5.2 max. The labels "Pin #1 indicator" and "Marking" point to the top surface.




Do not route traces or vias underneath the inductor


Parts packaged on 13" diameter reel, 2,600 parts per reel.

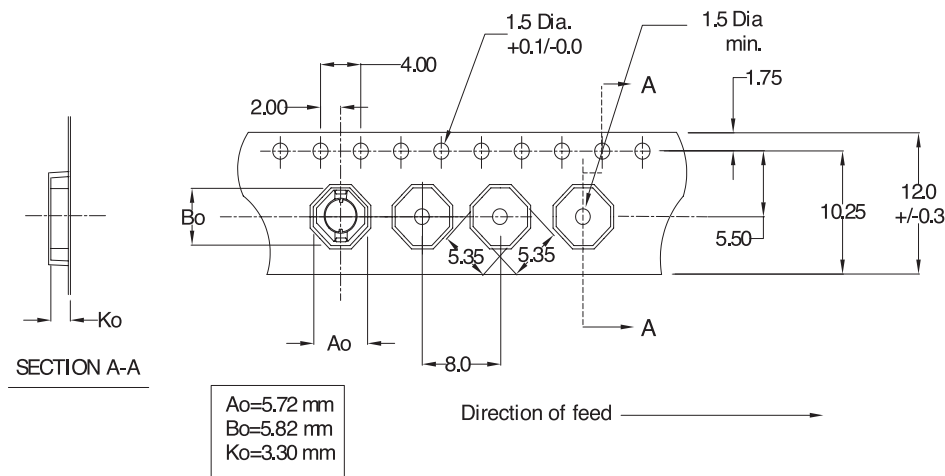

Core loss vs. Bp-p

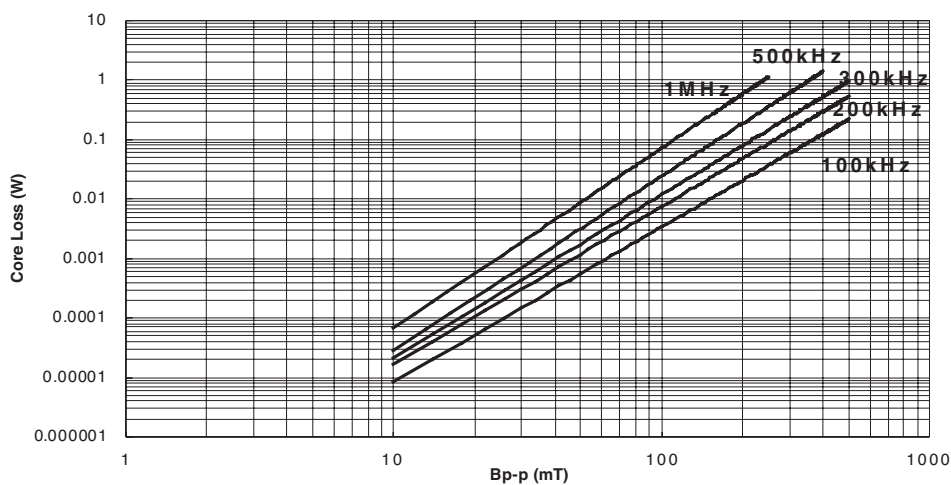


Temperature rise vs. total loss

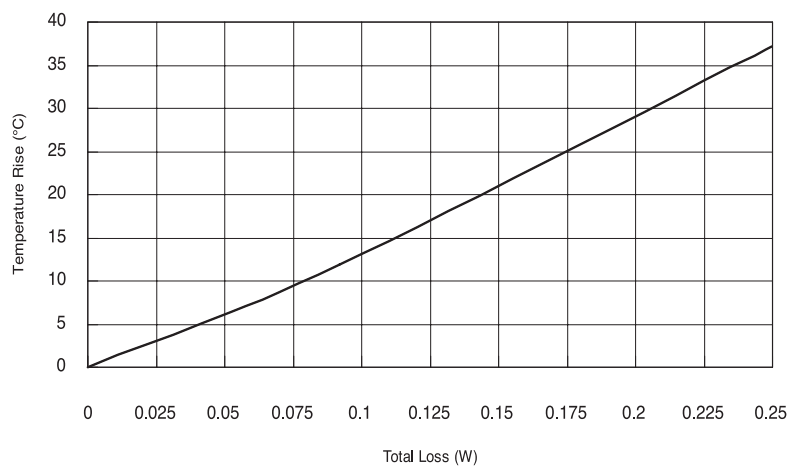

Inductance characteristics

OCL vs. Isat

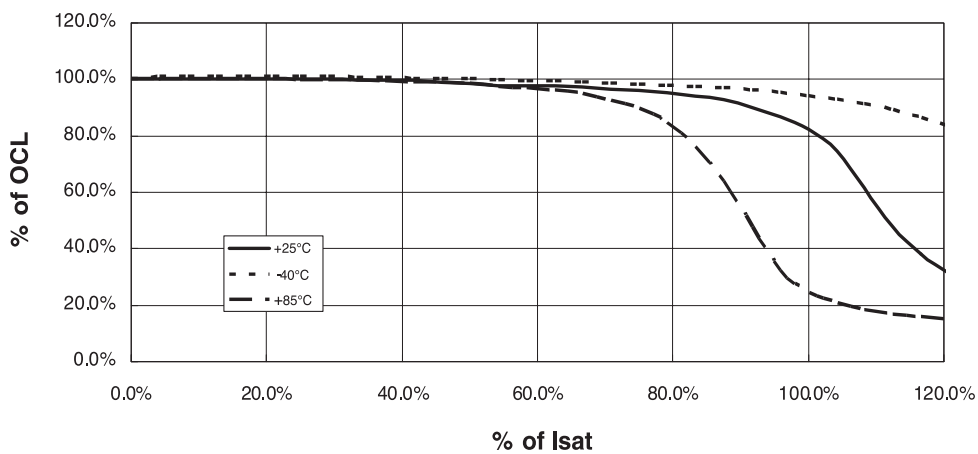

Solder reflow profile

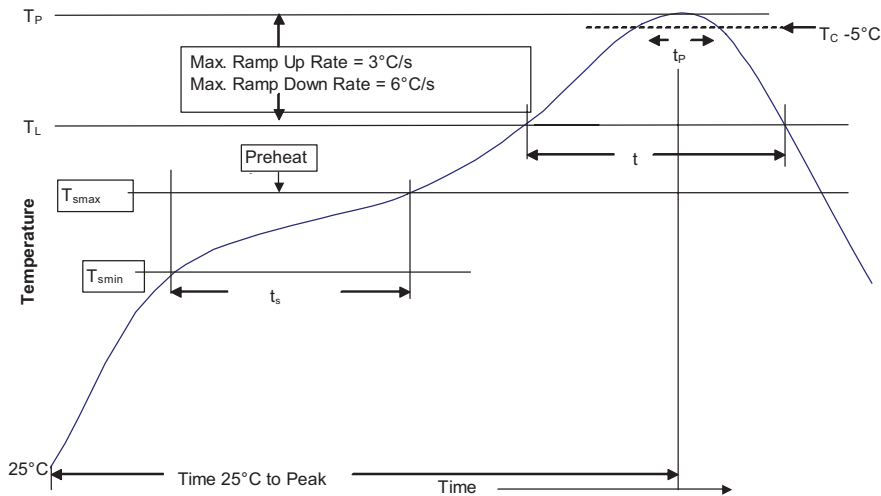


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JEDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_P	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_P)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_P to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 4149
November 2015

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SD53-4R7-R](#) on WIN SOURCE

 [Eaton Bussmann](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management