





THE DATASHEET OF HSTT100-Y



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF THE COMPANY.

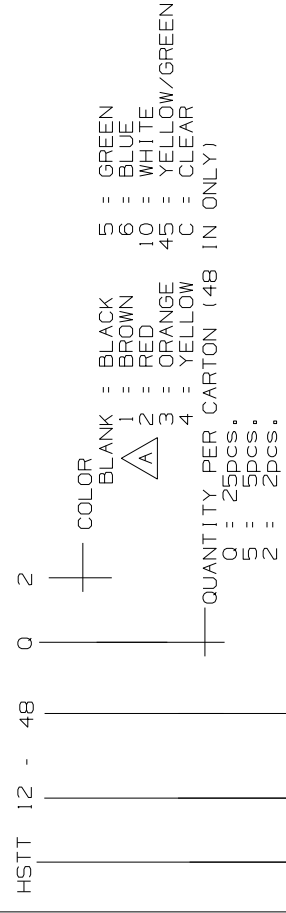

TT = THIN WALL
TTV = THIN WALL VW-1 RATED

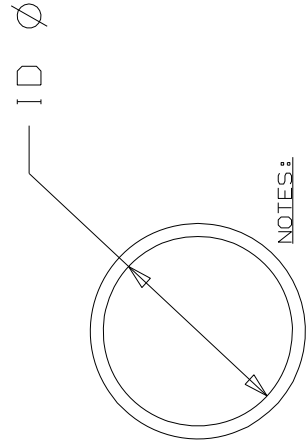

NOTES:

- SHRINK RATIO: 2:1
- MATERIAL: CROSSLINKED POLYOLEFIN
- "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE."
- REELS OF PRODUCT ARE ALLOWED TO HAVE SPLICES.

PACK CODE	M	D	T	C	L	Q
ALLOWED SPLICES	4	3	2	1	1	0

3	5/15/13	LEF	VJS	△	ADDED NOTE #4 ALLOWED SPLICES PER REEL LENGTH	GB0239KH	3	RAMI	
2	2/21/12	LEF		△	ADDED "CUSTOMER DRAWING" TO TITLE BLK REMOVED ALL TOLERANCES IN TITLE BLK	GB0239KH	2	RAMI	
1	10/5/11	LEF		△	ADD COLORS 1 & 3 CHANGE METRIC (19.0 TO 19.1)	GB0239KH	1	RAMI	
REV	DATE	BY	CHK		DESCRIPTION	ECN	-	R	SUP

PANDUIT PART NUMBER	Min. Exp. I.D In. (mm)	Max. Rec. I.D In. (mm)
HSTT05	.046 (1.2)	.023 (.6)
HSTT06	.063 (1.6)	.031 (.8)
HSTT09	.093 (2.4)	.046 (1.2)
HSTT12	.125 (3.2)	.062 (1.6)
HSTT19	.187 (4.8)	.093 (2.4)
HSTT25	.250 (6.4)	.125 (3.2)
HSTT38	.375 (9.5)	.187 (4.8)
HSTT50	.500 (12.7)	.250 (6.4)
HSTT75	.750 (19.1)	.375 (9.5)
HSTT100	1.000 (25.4)	.500 (12.7)
HSTT150	1.500 (38.1)	.750 (19.1)
HSTT200	2.000 (50.8)	1.000 (25.4)
HSTT300	3.000 (76.2)	1.500 (38.1)
HSTT400	4.000 (101.6)	2.000 (50.8)

DIMENSIONS IN BRACKET

CAD FILE NAME/LAYERS

G03597HN_DC

PANDUIT

HSTT THIN SHRINKABLE CUSTOMER

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

(.X) (XXX) (XX) ANGLES

DRAWN BY LGRAVITT

DATE 5/12/03

CHK'D

MAT'L:

SEE NOTES

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View HSTT100-Y on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management