




THE DATASHEET OF 7X25020004

SMD Crystal Oscillators- CMOS Output 3.2 x 2.5 x 1.0 mm 7X Series




Features

- Ultra Small SMD seam sealed clock crystal oscillator units.
- For applications in WLAN, Bluetooth, DSC, DSL and other IT product.
- Tri-state function available.
- RoHS Compliant / Pb Free.


Electrical Specifications

Item / Type	7X	
Output Type	CMOS	
Output Load	15 pF , or specify	
Oscillation Mode	Fundamental / 3rd Overtone	
Supply Voltage	1.8 V	2.5 V , 2.8 V , 3.3 V
Frequency Range	1 ~ 125 MHz	
Frequency Stability	± 25 ppm , ± 50 ppm	
Operating Temperature Range	- 10 ~ + 70 °C , - 40 ~ + 85 °C	
Storage Temperature Range	- 55 ~ + 125 °C	
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD	
Rise (Tr) / Fall (Tf) Time	8 ns Max.	
Supply Current	15 mA Max.	
Symmetry	45 ~ 55 %	
Start-up Time	5 ms Max.	
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max.	
Aging (at 25 °C)	± 3 ppm / year Max.	

Dimensions

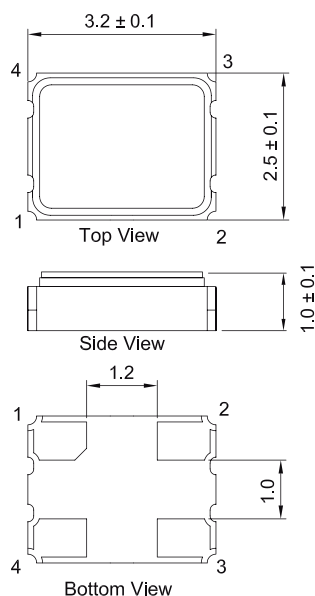

PAD FUNCTION:
1: ENABLE CONTROL
2: GND
3: OUT
4: VDD



Units: mm

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 7X25020004](#) on WIN SOURCE

 [TXC CORPORATION](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management