



THE DATASHEET OF S70-220102045R



Customer Information Sheet

DRAWING No.: S70-22010XX045R


IF IN DOUBT - ASK

©

NOT TO SCALE

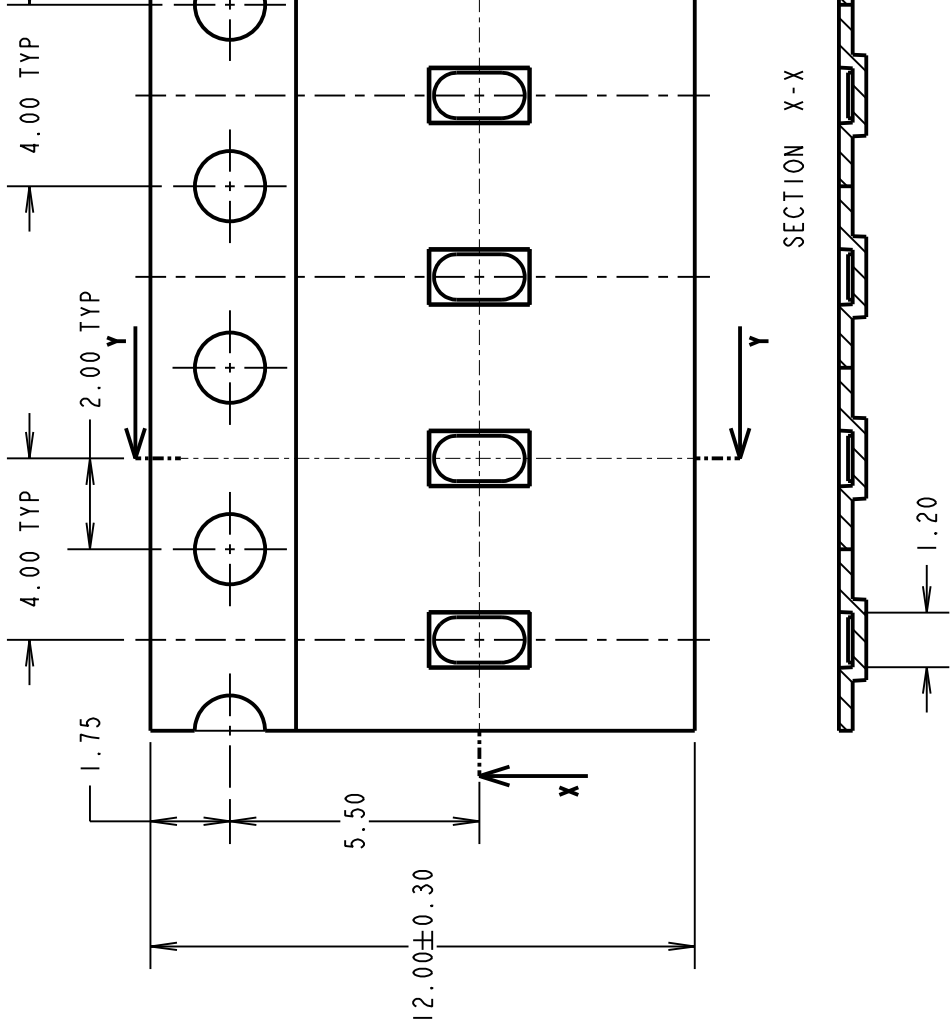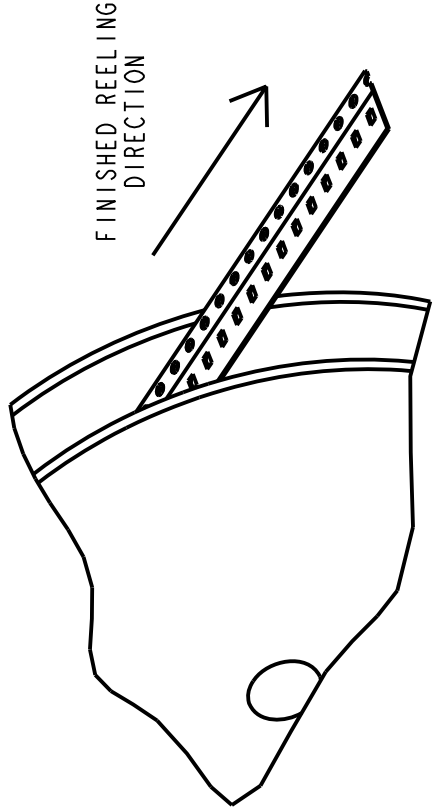

COMPONENT DETAILS

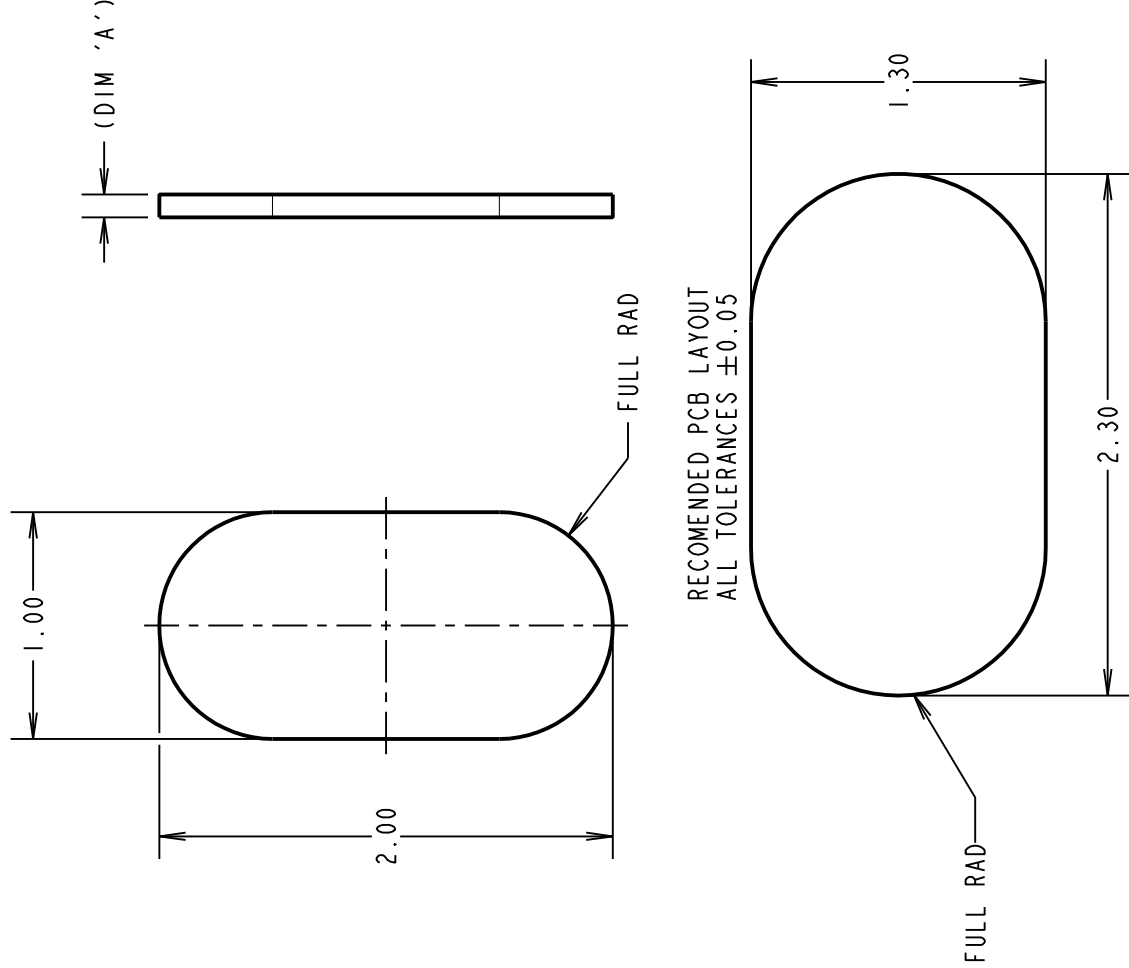

PART	DIM 'A'
S70-220101045R	0.10±0.05
S70-220102045R	0.20±0.05

RECOMMENDED PCB LAYOUT
ALL TOLERANCES ±0.05

ORDER CODE:
S70-22010XX45R
SIZE:
LENGTH
WIDTH
DIM 'A' = THICKNESS

SPECIFICATIONS:

FINISH: 0.025 - 0.075µm GOLD OVER 1.
ELECTRICAL:
CURRENT RATING = 6.0A
CONTACT RESISTANCE = 0.15mΩ
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°

NOTES:

- QUANTITY OF COMPONENTS PER TAPE IS TAPE AND REELED WITH EIA-481 (ELECTRONIC IN
- PRODUCT IS TAPE AND REELED

HARWIN
www.harwin.com
technical@harwin.com

TOLERANCES	MATERIAL
X. = ±1mm	
X.X = ±0.50mm	
X.XX = ±0.20mm	
X.XXX = ±0.01mm	
ANGLES = ±5°	
UNLESS STATED	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  View [S70-220102045R](#) on WIN SOURCE
-  [Harwin Inc.](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management